

A NEW TIMESTEP CRITERION FOR THE SIMULATION OF IMMISCIBLE TWO-PHASE FLOW WITH IMPES SOLVERS

Dominik Burr^{1,2} , Stefan Rief¹ , Konrad Steiner¹ 

¹*Flow and Material Simulation, Fraunhofer Institute for Industrial Mathematics (ITWM),
Fraunhofer-Platz 1, 67663 Kaiserslautern, Germany*

²*Department of Mathematics, RPTU Kaiserslautern-Landau, Gottlieb-Daimler-Straße 48, 67663
Kaiserslautern, Germany*

Correspondence to:

Dominik Burr,
dominikburrsc@gmail.com

How to Cite:

Burr, D., Rief, S., Steiner, K. (2026). A New Timestep Criterion for the Simulation of Immiscible Two-Phase Flow with IMPES Solvers. *InterPore Journal*, 3(3), IPJ020926-5.
<https://doi.org/10.69631/4cawkg52>

RECEIVED: 1 Oct. 2025

ACCEPTED: 17 June 2026

AVAILABLE ONLINE:

1 July 2026

VERSION OF RECORD:

2 Sept. 2026

ABSTRACT

We present an IMplicit Pressure Explicit Saturation (IMPES) solver and a novel timestep criterion for the simulation of immiscible two-phase flow involving compressible fluid phases. The novel timestep criterion uses the Courant-Friedrichs-Lewy (CFL) condition and employs numerically computed velocity derivatives to adapt the timestep size, regardless of the dominant flow characteristics.

The solver combined with this timestep criterion demonstrates both efficiency and robustness across a range of flow scenarios, including pressure drop dominated and capillary dominated flows with compressible and incompressible fluid phases, without the need to adjust any numerical parameters. Furthermore, it successfully reaches the expected stationary states in a case involving discontinuous porous media parameters such as porosity, permeabilities, and capillary pressure function.

Comparison with the established Coats timestep criterion reveals that our approach requires fewer time iterations while maintaining comparable accuracy on the Buckley-Leverett problem and a gravity-capillary equalization example with a known stationary state. Additionally, in an example with air compression, the new timestep criterion leads to a significantly improved non-wetting phase mass conservation compared to the Coats criterion.

KEYWORDS

Timestep criterion, Immiscible two-phase flow, IMplicit Pressure Explicit Saturation methods, IMPES solver, Compressible fluid phases, Computational fluid dynamics, Capillary effects, Two-phase Darcy equations, Courant-Friedrichs-Lewy, CFL condition, Buckley-Leverett problem

WHY THIS PAPER MATTERS

Accurately simulating how fluids move through complex materials like soil, rock, or battery parts is a major challenge for engineers, as computer models can often become slow or unstable when conditions change. Our work

introduces a smart method that automatically adjusts the simulation's pace, ensuring it remains fast and reliable even when dealing with difficult scenarios like highly compressible fluid phases or drastically changing porous materials. These findings help experts in fields like carbon storage, groundwater protection, and green energy manufacturing achieve more precise predictions with less computing power, accelerating the development of critical new technologies.



© 2026 The Authors

This is an open access article published by InterPore under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License (CC BY-NC-ND 4.0) (<https://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. INTRODUCTION

Simulating two-phase flow in porous media plays a crucial role across a variety of fields. In geological engineering, simulating two-phase flow supports applications such as the extraction of gas and oil (22, 32), investigations of groundwater contamination (1, 34), geological CO₂ storage (30, 38), and the analysis of salt precipitation (40). Outside of geology, two-phase flow simulations are also used in manufacturing processes, including electrolyte injection in lithium-ion batteries (16, 17) and the fabrication of composite materials through techniques such as liquid composite molding (31, 43). Additionally, two-phase flow models have been used to study transport phenomena in fuel cells by Sun et al. (41) and Djilali and Sui (14).

We describe immiscible two-phase flow using the two-phase Darcy equations for Newtonian compressible fluids. This is a non-linear partial differential equation (PDE) system, which is introduced in Section 2.1. Two primary approaches exist for simulating this equation system. The first is the fully implicit method, which solves the entire coupled PDE system implicitly (8, 23) and is unconditionally stable. The second is the sequential approach, encompassing IMPlicit Pressure Explicit Saturation (IMPES) methods (9, 20, 37) and iterative schemes (15, 21, 35). In this approach, the PDE system is decoupled and solved sequentially, which reduces the size of the linear system solved at each timestep, thereby lowering memory usage and runtime per time iteration. In IMPES methods, the saturation equation is solved explicitly. Consequently, a linear system of equations only needs to be solved for the pressure equation. However, sequential methods are only conditionally stable, meaning the timestep size must be restricted to maintain the stability of the numerical solver. As a result, the computational savings gained per time iteration may be offset by the need for smaller timestep sizes.

While fully implicit methods generally handle compressible fluid phases without difficulty, sequential methods face greater challenges because fluid phase masses depend explicitly on phase pressure and saturation. Since the pressure and saturation equations are solved sequentially, errors from this decoupling can lead to violations of the mass conservation of the fluid phases. Chi et al. (10) developed an IMPES method for two-phase flow with a compressible non-wetting phase, excluding capillary forces. Sequential methods that discretize the saturation equation implicitly or semi-implicitly for compressible two-phase flow are for instance presented by Pau et al. (36), Lu and Wheeler (28), and Lee, Wolfsteiner, and Tchelepi (27).

Because sequential methods are only conditionally stable, selecting appropriate timestep sizes is critical. Several timestep criteria specifically for sequential immiscible two-phase flow simulations exist. In Section 2.3.5, we mention two such criteria from the literature. The first, known as the Coats criterion, is derived via Neumann stability analysis (11). The second, referred to by us as the characteristic wave velocity criterion, is used by Lamine and Edwards (25) and is based on the Courant-Friedrichs-Lewy (CFL) condition (33).

Section 2.3 presents an IMPES solver with a finite volume discretization, along with a novel timestep criterion. This novel timestep criterion generalizes the characteristic wave velocity criterion, which, to the knowledge of the authors, is new to the literature. The timestep criterion uses numerical approximations of the derivative of the wetting phase velocity to limit the timestep based on the CFL condition. A detailed description is provided in Section 2.3.5. By incorporating capillary forces and numerical approximations of saturation derivatives of velocities, this generalized criterion effectively restricts the timestep regardless of the dominant flow dynamics. Throughout this work, it is referred to as the generalized characteristic wave velocity criterion.

The solver combined with the timestep criterion is evaluated and validated through several examples in Section 3, including capillary dominated and pressure drop dominated flows. Additionally, the capability of the solver to accurately simulate compressible fluid phases and to handle flows in geometries with discontinuous material parameters is assessed. Simulations involving discontinuous material parameters are of interest in the literature as there are various applications of two-phase flow with discontinuous material parameters (2, 5, 19, 29). In the considered flow examples, the accuracy and efficiency of the new timestep criterion are compared against the Coats and the characteristic wave velocity criteria. These comparisons indicate that the new timestep criterion is better suited to restrict the timestep of capillary dominated flows than the characteristic wave velocity criterion. Moreover, compared to the Coats criterion, it reduces the number of time iterations required while maintaining similar accuracy, and in the example from Section 3.4, it achieves a significantly better mass conservation of the air.

2. MATERIALS AND METHODS

2.1. Two-Phase Darcy Equations

The governing equations for the two-phase Darcy flow of Newtonian fluids are given by **Equations 1–4**:

$$\frac{\partial \phi \rho_d S_d}{\partial t} = -\nabla \cdot (\rho_d u_d) \text{ for } d \in \{w, n\} \quad (1)$$

$$u_d = -M_d K_0 (\nabla p_d - \rho_d g) \text{ for } d \in \{w, n\} \quad (2)$$

$$S_w + S_n = 1 \quad (3)$$

$$p_n - p_w = p_c(S_w) \quad (4)$$

The subscripts "w" and "n" represent the wetting and non-wetting phase, respectively. Both fluid phases and the solid phase determine whether a fluid acts as the wetting or non-wetting phase. The unknowns of the PDE system are usually the phase velocities u_d , the phase pressures p_d and the phase saturations S_d . The phase saturations $S_d \in [0, 1]$ indicate how much pore space is occupied by phase d .

The phase mobilities M_d are defined as

$$M_d = \frac{k_{rd}}{\mu_d} \text{ for } d \in \{w, n\} \quad (5)$$

and the total mobility M as

$$M = M_w + M_n \quad (6)$$

Moreover, g is the gravity constant, $\phi \in [0, 1]$ is the porosity, K_0 is the absolute permeability tensor, ρ_d is the density of phase d and μ_d is the viscosity of phase d .

The capillary pressure function p_c and the relative permeabilities k_{rd} are material parameters that are dependent on the phase saturations S_d . The capillary pressure function relates the pressures of the wetting and non-wetting phases according to **Equation 4**. The relative permeabilities are

scalar functions with values between zero and one that model the reduced ability of a fluid phase to flow through a porous medium when its pores are partially occupied by another fluid.

In all examples of this work, we assume either constant phase densities or the ideal gas law (26). Because we assume the temperature to be constant during our simulations, the ideal gas law states that there is a linear dependence between the density and the pressure of a fluid phase. We denote

$$\rho_d = \frac{1}{R_d}(p_d - p_d^{ref})\rho_d^{ref} + \rho_d^{ref} \quad (7)$$

where R_d is the gas constant of phase d and ρ_d^{ref} is the density of the phase at the reference phase pressure p_d^{ref} . To evaluate **Equation 7**, the value of R_d and the density of the fluid phase at one pressure value are required.

To reduce the number of unknowns, we transform the system of equations 1 - 4 to

$$\frac{\partial \phi \rho_w S_w}{\partial t} = -\nabla \cdot (f_w \rho_w (u + M_n u_D)) \quad (8)$$

$$u = K_0(-M \nabla p_n + M_w \nabla p_c + (M_w \rho_w + M_n \rho_n)g) \quad (9)$$

$$0 = \nabla \cdot u + \sum_{d=w,n} \frac{1}{\rho_d} \left(\nabla \rho_d \cdot u_d + \phi S_d \frac{\partial \rho_d}{\partial t} \right) \quad (10)$$

where

$$u_w = f_w u + f_w K_0 M_n (\nabla p_c + (\rho_w - \rho_n)g) = f_w u + \gamma u_D \quad (11)$$

$$u_n = f_n u - f_w K_0 M_n (\nabla p_c + (\rho_w - \rho_n)g) = f_n u - \gamma u_D \quad (12)$$

$$u_D = K_0 (\nabla p_c + (\rho_w - \rho_n)g) \quad (13)$$

$$u = u_w + u_n, \quad (14)$$

$$p_c = p_n - p_w \quad (15)$$

In this formulation u is the so-called total velocity. The fractional flow f_d and the coefficient γ are defined as

$$f_d = \frac{M_d}{M}, \quad (16)$$

$$\gamma = \frac{M_w M_n}{M} = M_n f_w \quad (17)$$

A similar reformulation of the two-phase Darcy equations was done by Bastian (1).

2.2. Capillary Pressure and Relative Permeability Functions

In this work, we use simplified Brooks-Corey relative permeabilities, while for the capillary pressure functions, we use either the Brooks-Corey or Van Genuchten models. To introduce these, we first define effective phase saturations by

$$\bar{S}_d = \frac{S_d - S_{d,r}}{1 - S_{w,r} - S_{n,r}} \quad \text{for } d = w, n$$

In the above equation $S_{w,r}$ is the residual wetting phase saturation and $S_{n,r}$ is the residual non-wetting phase saturation.

The Brooks-Corey capillary pressure function (6) is given by

$$p_c^{BC}(S_w) = p_e^{BC} \bar{S}_w^{-m^{BC}}$$

where p_e^{BC} and m^{BC} are parameters that are depended on the porous medium. The Van Genuchten capillary pressure function (42) is given by

$$p_c^{VG}(S_w) = p_e^{VG} \left((\bar{S}_w)^{-\frac{1}{m^{VG}}} - 1 \right)^{1-m^{VG}}$$

Here p_e^{VG} and m^{VG} need to be adapted to the respective porous medium.

As relative permeability models, we use the simplified Brooks-Corey functions (12) that are given by


$$k_{rw}^{BC}(S_w) = (\bar{S}_w)^{m^{w,BC}}$$

$$k_{rn}^{BC}(S_w) = (1 - \bar{S}_w)^{m^{n,BC}}$$

where $m^{w,BC}$ and $m^{n,BC}$ are material parameters. In Section 2.3.5, we formulate a maximization problem involving the derivatives of the relative permeabilities with respect to the saturation S_w . When $m^{w,BC} \geq 1$ and $m^{n,BC} \geq 1$, this poses no issue, because the derivatives of the Brooks-Corey relative permeabilities are finite. However, if either $m^{w,BC} < 1$ or $m^{n,BC} < 1$, the derivatives become unbounded. In this case, it is necessary to restrict the derivatives during the maximization.

2.3. IMPES Solver

The solution of the PDE system (Eqs. 8 - 10) is approximated using an IMPES method on a voxel grid. Moreover, a timestep criterion is provided to ensure the stability of the solver. Although this work only considers the ideal gas law or incompressible fluid phases in the examples, the solver presented in this section can, in principle, accommodate other relations between phase pressures and phase densities. The necessary inputs for the solver are the function describing this relation and its derivative with respect to the corresponding phase pressure. We note that such cases are not included in the validation examples presented in this work.

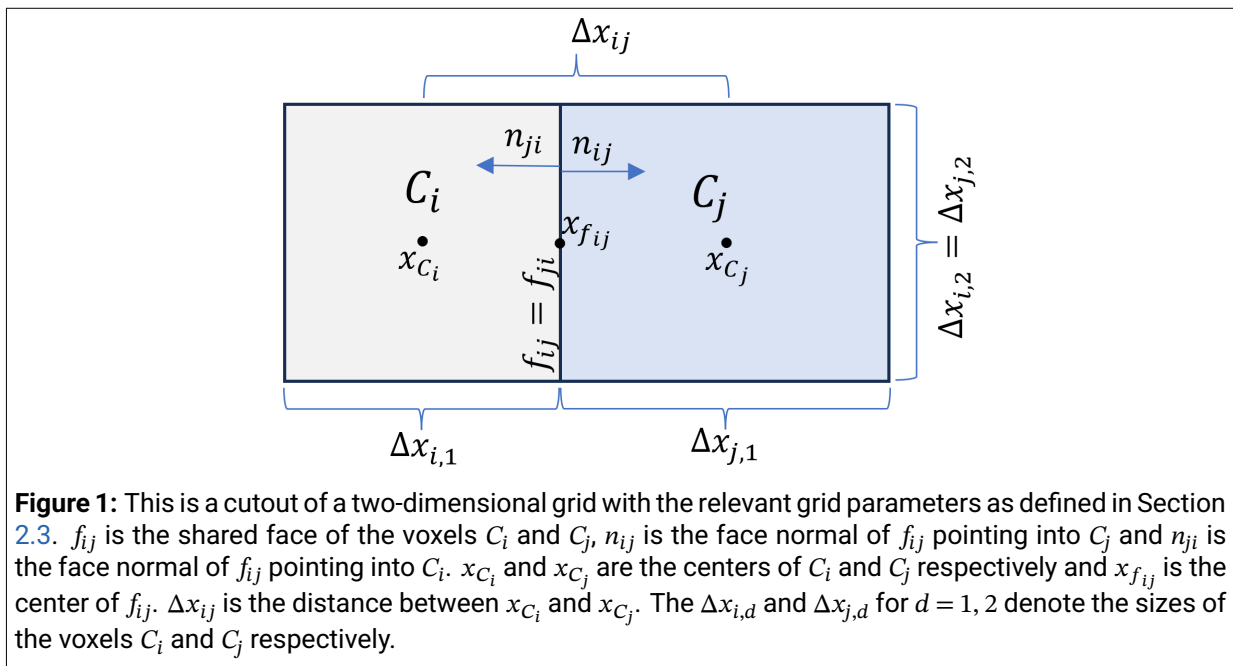

An individual cell of the voxel grid is denoted by C_i , where $i \in \mathbb{N}$. All cells are cuboids or rectangles, dependent if the grid is two- or three-dimensional, that are aligned with the canonical unit vectors e_d for $d = 1, \dots, n_D$. We refer to cells similarly as voxels. We denote the dimension of the space by $n_D \in \{2, 3\}$. We explain the notations of the grid only for the three-dimensional case. The notations in the two-dimensional case are accordingly.

The edge length of a cell C_i is denoted by $\Delta x_{i,d}$ and the volume of the cell by $|C_i|$. Because the cells are cuboids, it is

$$|C_i| = \prod_{d=1}^{n_D} \Delta x_{i,d}$$

With f_{ij} , we denote a shared face of the voxels C_i and C_j . We denote the face normal of f_{ij} pointing into C_j as n_{ij} and the face normal pointing into C_i as n_{ji} . As the grid is aligned to the canonical unit vectors we can define

$$d_{ij} \in \{1, \dots, n_D\} \text{ so that } n_{ij} = -n_{ji} = \pm e_{d_{ij}}$$

Further, we define the function

$$\text{sign}(n_{ij}) := \begin{cases} +1, & \text{if } n_{ij} = e_{d_{ij}} \\ -1, & \text{if } n_{ij} = -e_{d_{ij}} \end{cases}$$

With $\mathbb{V}$, we denote the set of all cells of the grid. By F_{C_i} , we denote the set containing all faces of the cell C_i , and by $F_{C_i}^d$, we denote the set containing all faces of the cell C_i that are orthogonal to e_d . There are always exactly two faces in the sets $F_{C_i}^d$.

We denote the center of a cell C_i by x_{C_i} and the center of a face f_{ij} by $x_{f_{ij}}$. The distance between x_{C_i} and x_{C_j} is denoted by Δx_{ij} and the area of a face f_{ij} is denoted by $|f_{ij}|$.

A two-dimensional example of all the defined grid variables is given in **Figure 1**.

In the solver it is necessary to evaluate variables on face centers which only have values on cell centers. Therefore, averages of the adjacent cell-centered values are used. To simplify the notation in the following sections, we define for an arbitrary variable ψ the harmonic and arithmetic average on a face f_{ij} by

$$\bar{\psi}^{H,f_{ij}} := \frac{2\Delta x_{ij}\psi_i\psi_j}{\Delta x_{i,d_{ij}}\psi_j + \Delta x_{j,d_{ij}}\psi_i} \quad (18)$$

$$\bar{\psi}^{A,f_{ij}} := \frac{1}{2\Delta x_{ij}} (\Delta x_{i,d_{ij}}\psi_j + \Delta x_{j,d_{ij}}\psi_i) \quad (19)$$

In the solver, gradients of variables such as the capillary pressure or the non-wetting phase pressure must be approximated. These gradients are evaluated at the face centers using

$$\nabla q_{f_{ij}} \cdot n_{ij} := \frac{\text{sign}(n_{ij})}{\Delta x_{ij}} (q_j - q_i) \quad (20)$$

where q denotes an arbitrary variable, f_{ij} is the face between cells C_i and C_j , q_i and q_j are the cell-centered values of q in C_i and C_j , respectively, n_{ij} denotes the normal associated with f_{ij} , and Δx_{ij} is the distance between the centers of cells C_i and C_j .

2.3.1. Pseudo Algorithm

Below the finite volume based method to solve the two-phase Darcy equations is given as pseudo code. It is assumed that the first $k-1$ time iterations were completed and that the variables $S_{w,i}^{k-1}, S_{w,i}^{k-2}, p_{n,i}^{k-1}, p_{n,i}^{k-2}, u_{f_{ij}}^{k-1}, u_{D,f_{ij}}^{k-1}, u_i^{k-1}, u_i^{k-2}, u_{D,i}^{k-1}$ and $u_{D,i}^{k-2}$ are accessible to the algorithm. The index i refers to the cell C_i in the grid, the index k denotes the timestep number, and f_{ij} denotes the face between cells C_i and C_j in the grid.

The parameter $m_I \geq 1$ refers to the number of IMPES iterations, i.e., the number of sequential solves of the PDE system that is carried out in every time iteration. The number m_I is fixed in the algorithm, meaning that in each time step exactly m_I IMPES iterations are performed, indexed by $l = 1, \dots, m_I$.

1. Select the timestep size Δt_k .
2. For $l = 1, \dots, m_I$ repeat:
Define $k_0 := k - 1$.

- (a) Calculate the saturation $S_{w,i}^{k_l}$ on all cells C_i .
- (b) Calculate the pressure $p_{n,i}^{k_l}$ on all cells C_i .
- (c) Calculate the velocities $u_{f_{ij}}^{k_l}$ and $u_{D,f_{ij}}^{k_l}$ on all faces f_{ij} .

After the last IMPES iteration $l = m_I$:

Define $S_{w,i}^k := S_{w,i}^{k_{m_I}}$, $p_{n,i}^k := p_{n,i}^{k_{m_I}}$, $u_{f_{ij}}^k := u_{f_{ij}}^{k_{m_I}}$ and $u_{D,f_{ij}}^k := u_{D,f_{ij}}^{k_{m_I}}$.

3. Calculate the cell velocities u_i^k and $u_{D,i}^k$ on all cells C_i by linear interpolation of the respective face velocities.
4. Continue with the next time iteration $k + 1$.

Within the inner loop for $l = 1, \dots, m_I$, it is required to store S_w and p_n from both the previous timestep $k - 1$ and the last IMPES iteration k_{l-1} . However, for the velocities $u_{f_{ij}}$ and $u_{D,f_{ij}}$, only the values from the latest IMPES iteration k_{l-1} need to be stored.

In the following sections, the individual steps of the algorithm are explained in detail. The selection of the timestep (Step 1) is discussed after the remaining steps of the algorithm.

2.3.2. Calculation of the Saturation

In this section, Step 2a of the method is explained in more detail. We begin by rewriting the left-hand side of **Equation 8** as

$$\frac{\partial \phi \rho_w S_w}{\partial t} = \phi \left(\rho_w \frac{\partial S_w}{\partial t} + S_w \frac{\partial \rho_w}{\partial t} \right) = \phi \left(\rho_w \frac{\partial S_w}{\partial t} + S_w \frac{\partial \rho_w}{\partial p_w} \left(\frac{\partial p_n}{\partial t} - \frac{\partial p_c}{\partial t} \right) \right)$$

We use a Euler scheme to discretize the time derivative of S_w . The explicit occurrences of S_w are implicitly discretized using $S_{w,i}^{k_l}$, i.e., the saturation that is determined in this step. On the right-hand side of **Equation 8**, we use the Gauss divergence theorem and an upwind scheme. In the material functions, the saturation values of the last IMPES iteration are used. This leads to the discretized equation

$$S_{w,i}^{k_l} = \frac{S_{w,i}^{k_{l-1}} - \frac{\Delta t_k}{\phi_i |C_i| \rho_{w,i}^{k_{l-1}}} \sum_{f_{ij} \in F_{C_i}} |f_{ij}| \rho_{w,f_{ij}}^{k_{l-1}} F_{f_{ij}}^{up,k_{l-1}}}{1 + \frac{1}{\rho_{w,i}^{k_{l-1}}} \frac{\partial \rho_{w,i}^{k_{l-1}}}{\partial p_w} \left(p_{n,i}^{k_{l-1}} - p_{c,i}^{k_{l-1}} - p_{n,i}^{\tilde{k}_l} + p_{c,i}^{\tilde{k}_l} \right)} \quad (21)$$

of the saturation in cell C_i . In this formula, the index

$$\tilde{k}_l = \begin{cases} k - 2, & \text{if } l = 1 \\ k - 1, & \text{else} \end{cases} \quad (22)$$

must be defined differently for the first IMPES iteration in a time iteration. Otherwise, the denominator in **Equation 21** would be 0 in the first IMPES iteration.

The numerical flux function is defined as

$$F_{f_{ij}}^{up,k_{l-1}} = f_{w,f_{ij}}^{up,k_{l-1}} \left(u_{f_{ij}}^{k_{l-1}} + \tilde{u}_{D,f_{ij}}^{k_{l-1}} \right) \cdot n_{ij} \quad (23)$$

where the coefficient function f_w is calculated by an upwind scheme

$$f_{w,f_{ij}}^{up,k_{l-1}} := \begin{cases} f_w \left(S_{w,i}^{k_{l-1}} \right), & \text{if } \left(u_{f_{ij}}^{k_{l-1}} + \tilde{u}_{D,f_{ij}}^{k_{l-1}} \right) \cdot n_{ij} \geq 0 \\ f_w \left(S_{w,j}^{k_{l-1}} \right), & \text{else} \end{cases} \quad (24)$$

Moreover, it is

$$u_{D,f_{ij}}^{k_{l-1}} := \overline{M_n^{k_{l-1}} K_0}^{H,f_{ij}} \nabla p_{c,f_{ij}}^{k_{l-1}} + \overline{M_n^{k_{l-1}} K_0}^{H,f_{ij}} \left(\overline{\rho_w^{k_{l-1}}}^{A,f_{ij}} - \overline{\rho_n^{k_{l-1}}}^{A,f_{ij}} \right) g \quad (25)$$

The calculation of the total velocity $u_{f_{ij}}^{k_{l-1}}$ is described in Section 2.3.4.

In **Equation 25**, we select the harmonic mean of $M_n K_0$ to ensure consistency with the discrete pressure equation, which is presented in Section 2.3.3. Maintaining consistency between the discrete saturation and pressure equations is essential because, in the formulation of the two-phase Darcy equations used by the solver, mass conservation of the non-wetting phase is only implicitly guaranteed by combining the saturation and pressure equation. Furthermore, since compressible fluid phases are considered, updating the phase pressure also influences the phase masses. If, for instance, the total velocity is discretized differently in the pressure and saturation equations, this could introduce an error in the non-wetting phase mass.

Therefore, the harmonic mean of the phase mobilities times the absolute permeability is consistently applied throughout all steps of the algorithm. For the same reason, the upwinding of f_w for calculating u_w in **Equation 25** is also consistently used for discretizing the phase velocities u_d in the solver. If the timesteps are small enough, the upwinding and the definition of the discretized velocities ensure that the saturation cannot exceed the bounds given by the irreducible phase saturations.

2.3.3. Calculation of the Pressure

In this section, Step 2b of the method is explained in more detail. By using

$$\nabla \cdot (\rho_d u_d) = \nabla \rho_d \cdot u_d + \rho_d \nabla \cdot u_d \Leftrightarrow \nabla \rho_d \cdot u_d = \nabla \cdot (\rho_d u_d) - \rho_d \nabla \cdot u_d$$

Equation 10 can be rewritten as

$$0 = \nabla \cdot u + \sum_{d=w,n} \frac{1}{\rho_d} \left(\nabla \cdot (\rho_d u_d) - \rho_d \nabla \cdot u_d + \phi S_d \frac{\partial \rho_d}{\partial t} \right) \quad (26)$$

We employ this reformulation as this allows us to use only discretizations of gradients on faces. Before the reformulation, we would need to calculate gradients on cells for the discretizations of the phase velocities u_d on cells. We do not want to discretize gradients on cells as this can quickly lead to checkerboard instabilities. This is because, in a straightforward discretization of a cell-centered gradient, the discrete gradient does not depend on the value of the variable in the same cell. If this approximation is used in a finite volume solver, the cells are divided in two disjoint sets arranged in a checkerboard pattern. The cells within each set interact only within one another, which can readily lead to instabilities. This behavior was analyzed for the approximation of the Navier-Stokes equations by Rhie and Chow (39) and for the approximation of the wave equation by Dellacherie (13).

To simplify the notation in the following, we define

$$\begin{aligned} u_R &:= u + MK_0 \nabla p_n = K_0 (M_w \nabla p_c (M_w \rho_w + M_n \rho_n) g) \\ \Leftrightarrow u &= -MK_0 \nabla p_n + u_R \end{aligned} \quad (27)$$

By inserting this, together with **Equation 11** and **Equation 12**, into **Equation 26** and rearranging terms, we get

$$\begin{aligned} \sum_{d=w,n} \frac{1}{\rho_d} \nabla \cdot (\rho_d f_d MK_0 \nabla p_n) - \left(\frac{\phi S_w}{\rho_w} \frac{\partial \rho_w}{\partial p_w} + \frac{\phi S_n}{\rho_n} \frac{\partial \rho_n}{\partial p_n} \right) \frac{\partial p_n}{\partial t} &= \sum_{d=w,n} \frac{1}{\rho_d} \nabla \cdot (\rho_d f_d u_R) \\ &+ \frac{1}{\rho_w} \nabla \cdot (\rho_w f_w M_n u_D) - \frac{1}{\rho_n} \nabla \cdot (\rho_n f_n M_n u_D) - \frac{\phi S_w}{\rho_w} \frac{\partial \rho_w}{\partial p_w} \frac{\partial p_c}{\partial t} \end{aligned}$$

We discretize this equation by integrating over a cell C_i and using the Gauss divergence theorem. The discrete form of the equation that we use is

$$\begin{aligned}
& \sum_{f_{ij} \in F_{C_i}} |f_{ij}| A_{f_{ij}}^{k_l} \overline{M_{K_0}^{H,f_{ij}}} \nabla p_{n,f_{ij}}^{k_l} \cdot n_{ij} - \frac{|C_i| \phi_i}{\Delta t_k} \left(\frac{S_{w,i}^{k_l}}{\rho_{w,i}^{k_{l-1}}} \frac{\partial \rho_{w,i}^{k_{l-1}}}{\partial p_w} + \frac{(1 - S_{w,i}^{k_l})}{\rho_{n,i}^{k_{l-1}}} \frac{\partial \rho_{n,i}^{k_{l-1}}}{\partial p_n} \right) p_{n,i}^{k_l} \\
& = \sum_{f_{ij} \in F_{C_i}} |f_{ij}| A_{f_{ij}}^{k_l} \hat{u}_{R,f_{ij}}^{k_l} \cdot n_{ij} + \sum_{f_{ij} \in F_{C_i}} |f_{ij}| B_{f_{ij}}^{k_l} f_{w,f_{ij}}^{up,k_l} \hat{u}_{D,f_{ij}}^{k_l} \cdot n_{ij} \\
& - \frac{|C_i| \phi_i}{\Delta t_k} \left(\frac{S_{w,i}^{k_l}}{\rho_{w,i}^{k_{l-1}}} \frac{\partial \rho_{w,i}^{k_{l-1}}}{\partial p_w} (p_{n,i}^{k-1} + p_{c,i}^{k_l} - p_{c,i}^{k-1}) + \frac{(1 - S_{w,i}^{k_l})}{\rho_{n,i}^{k_{l-1}}} \frac{\partial \rho_{n,i}^{k_{l-1}}}{\partial p_n} p_{n,i}^{k-1} \right)
\end{aligned} \quad (28)$$

where

$$A_{f_{ij}}^{k_l} := \left(f_{w,f_{ij}}^{up,k_l} \frac{\rho_{w,f_{ij}}^{k_{l-1}}}{\rho_{w,i}^{k_{l-1}}} + (1 - f_{w,f_{ij}}^{up,k_l}) \frac{\rho_{n,f_{ij}}^{k_{l-1}}}{\rho_{n,i}^{k_{l-1}}} \right) \quad (29)$$

$$B_{f_{ij}}^{k_l} := \frac{\rho_{w,f_{ij}}^{k_{l-1}}}{\rho_{w,i}^{k_{l-1}}} - \frac{\rho_{n,f_{ij}}^{k_{l-1}}}{\rho_{n,i}^{k_{l-1}}} \quad (30)$$

$$\hat{u}_{R,f_{ij}}^{k_l} := \overline{M_{K_0}^{H,f_{ij}}} \nabla p_{c,f_{ij}}^{k_l} + \left(\overline{K_0 M_w^{H,f_{ij}}} \frac{A_{f_{ij}}^{k_l}}{\rho_w^{k_{l-1}}} + \overline{K_0 M_n^{H,f_{ij}}} \frac{A_{f_{ij}}^{k_l}}{\rho_n^{k_{l-1}}} \right) g \quad (31)$$

$$\hat{u}_{D,f_{ij}}^{k_l} := \overline{M_n^{H,f_{ij}}} \nabla p_{c,f_{ij}}^{k_l} + \overline{M_n^{H,f_{ij}}} K_0 \left(\frac{A_{f_{ij}}^{k_l}}{\rho_w^{k_{l-1}}} - \frac{A_{f_{ij}}^{k_l}}{\rho_n^{k_{l-1}}} \right) g \quad (32)$$

We solve the resulting linear system of equations by an algebraic multigrid method (24).

To justify the usage of the harmonic mean for the discretization of the velocities, we consider the phase velocity u_d as given by **Equation 11** or **Equation 12** respectively. We neglect the gravity term and we assume the phase velocity u_d as well as the phase pressure p_d to be continuous between two neighboring cells C_i and C_j with the same material parameters. The phase velocities need to be continuous because of the conservation of mass. We assume the phase pressures at the macroscale to be continuous as these represent the average of the microscopic phase pressures in an REV.

Using these assumptions the phase velocity u_d can be approximated with the values at C_i and f_{ij} or with the values at C_j and f_{ij} ,

$$u_{d,f_{ij}} = -M_{d,i} K_{0,i} \frac{p_{d,f_{ij}} - p_{d,i}}{0.5 \Delta x_{i,d_{ij}}} \quad (33)$$

$$u_{d,f_{ij}} = -M_{d,j} K_{0,j} \frac{p_{d,j} - p_{d,f_{ij}}}{0.5 \Delta x_{j,d_{ij}}} \quad (34)$$

We use these two equations to calculate the phase pressure at the face f_{ij}

$$p_{d,f_{ij}} = \frac{M_{d,i} K_{0,i} \Delta x_{j,d_{ij}} p_{d,i} + M_{d,j} K_{0,j} \Delta x_{i,d_{ij}} p_{d,j}}{M_{d,i} K_{0,i} \Delta x_{j,d_{ij}} + M_{d,j} K_{0,j} \Delta x_{i,d_{ij}}} \quad (35)$$

Inserting the face pressure back in **Equation 33** or **Equation 34** leads to

$$u_{d,f_{ij}} = \frac{2 \Delta x_{ij} M_{d,i} K_{0,i} M_{d,j} K_{0,j}}{M_{d,i} K_{0,i} \Delta x_{j,d_{ij}} + M_{d,j} K_{0,j} \Delta x_{i,d_{ij}}} \frac{p_{d,i} - p_{d,j}}{\Delta x_{ij}} = \overline{M_{K_0}^{H,f_{ij}}} \frac{p_{d,i} - p_{d,j}}{\Delta x_{ij}} \quad (36)$$

This shows that the continuity of the velocity and phase pressure lead to the usage of the harmonic mean of $M_d K_0$ at faces.

We discretize the respective terms in all velocities consistently with **Equation 36**, except for the total velocity u . The discrete formula for u is given in **Equation 40**. For u , we use $\overline{M_{K_0}^{H,f_{ij}}}$ as the coefficient of the non-wetting phase pressure gradient, and we refer to this discretization as the "Total Mobility" approach. The discretization consistent with **Equation 36** would instead use

$$\overline{M_w K_0}^{H,f_{ij}} + \overline{M_n K_0}^{H,f_{ij}} \quad (37)$$

as the coefficient of the non-wetting phase pressure gradient. We refer to this as the "Phase Mobility" discretization, and the two coefficients are not equal. We accept the inconsistency of the "Total Mobility" discretization, because it leads to a better mass conservation for compressible fluid phases in the example of Section 3.4. This comparison is presented in **Table 7**.

In the discrete pressure equation (**Eq. 28**), values of the phase densities at faces are needed. We calculate these values by calculating the phase pressures p_w and p_n at faces, and use these to determine the respective phase densities. If the phase densities additionally depend on other variables, such as temperature, these variables must also be calculated at the faces.

Consistent with **Equation 35**, we determine the phase pressures at a face f_{ij} by

$$p_{d,f_{ij}}^{k_{l-1}} = \frac{M_{d,i}^{k_l} K_{0,i} \Delta x_{j,d_{ij}} p_{d,i}^{k_{l-1}} + M_{d,j}^{k_l} K_{0,j} \Delta x_{i,d_{ij}} p_{d,j}^{k_{l-1}}}{M_{d,i}^{k_l} K_{0,i} \Delta x_{j,d_{ij}} + M_{d,j}^{k_l} K_{0,j} \Delta x_{i,d_{ij}}} \quad (38)$$

$$p_{c,f_{ij}}^{k_{l-1}} = p_{n,f_{ij}}^{k_{l-1}} - p_{w,f_{ij}}^{k_{l-1}} \quad (39)$$

2.3.4. Calculation of the Face Velocities

In this section, Step 2c of the solver is explained in more detail. The velocities u and u_D on faces are approximated by

$$u_{f_{ij}}^{k_l} = \text{sign}(n_{ij}) \left(-\overline{M^{k_l} K_0}^{H,f_{ij}} \nabla p_{n,f_{ij}}^{k_l} \cdot n_{ij} + \overline{M^{k_l} K_0}^{H,f_{ij}} \nabla p_{c,f_{ij}}^{k_l} \cdot n_{ij} \right) \quad (40)$$

$$+ \left(\overline{M^{k_l} K_0}^{H,f_{ij}} \frac{\overline{\rho_w^{k_l}}^{A,f_{ij}}}{\rho_w^{k_l}} + \overline{M^{k_l} K_0}^{H,f_{ij}} \frac{\overline{\rho_n^{k_l}}^{A,f_{ij}}}{\rho_n^{k_l}} \right) g \quad (41)$$

$$u_{D,f_{ij}}^{k_l} = \text{sign}(n_{ij}) \overline{K_0}^{H,f_{ij}} \nabla p_{c,f_{ij}}^{k_l} \cdot n_{ij} + \overline{K_0}^{H,f_{ij}} \left(\frac{\overline{\rho_w^{k_l}}^{A,f_{ij}}}{\rho_w^{k_l}} - \frac{\overline{\rho_n^{k_l}}^{A,f_{ij}}}{\rho_n^{k_l}} \right) g \quad (42)$$

These velocities are scalar-valued because only the component normal to each face is calculated.

2.3.5. Generalized Characteristic Wave Velocity Timestep Criterion

In this section, the timestep criterion used in Step 1 of the IMPES solver is described. In the following, we refer to it as the **generalized characteristic velocity criterion**. This criterion generalizes the approach described, for instance, by Lamine and Edwards (25).

The timestep criterion is based on the CFL condition (33). To derive it, we consider the saturation equation, **Equation 1**, and assume incompressible fluid phases,

$$\frac{\partial S_w}{\partial t} = -\frac{1}{\phi} \nabla \cdot u_w = -\frac{1}{\phi} \frac{\partial u_w}{\partial S_w} \cdot \nabla S_w \quad (43)$$

We assume that assuming incompressibility of the fluid phases does not substantially impact the flow or lead to instabilities. In Section 3.4, the timestep criterion demonstrates its capability to stabilize two-phase flow with compressible fluid phases, despite the assumption of incompressibility in the derivation.

If we assume for a moment that the derivative of u_w in **Equation 43** is constant, the CFL condition of this linear system is given by

$$\Delta t \leq \min_{C_i \in \mathbb{V}} \left(\frac{\phi_i C_{stab}}{\sum_{d=1}^{n_D} \frac{1}{\Delta x_{i,d}} |\omega_{ij}|} \right) \quad (44)$$

where

$$\omega_{ij}(S_w) := \left. \frac{\partial u_w}{\partial S_w} \right|_{f_{ij}} \cdot n_{ij} \stackrel{\text{Eq. 11}}{=} \left(\frac{\partial f_w}{\partial S_w} u + \frac{\partial \gamma}{\partial S_w} u_D + f_w \frac{\partial u}{\partial S_w} + \gamma \frac{\partial u_D}{\partial S_w} \right) \Big|_{f_{ij}} \cdot n_{ij} \quad (45)$$

is the so-called characteristic wave velocity on face f_{ij} , and $C_{stab} > 0$ is the so-called stability constant. In the nonlinear case, the characteristic wave velocity ω_{ij} varies with saturation and is not constant. To obtain a computationally efficient CFL condition for the non-linear scenario, we use **Equation 44** while maximizing ω_{ij} over the local saturation values.

The derivatives of f_w and γ are straightforward to compute, because in these terms only the relative permeabilities depend on the saturation. The derivatives of u and u_D are more complicated. Instead of deriving exact expressions for these derivatives, we develop numerical approximations.

For the approximation of the derivative of u , we consider

$$n_{ij}^T \nabla u(S_w, p_n) n_{ij} = \left(\frac{\partial u}{\partial S_w} \cdot n_{ij} \right) (\nabla S_w \cdot n_{ij}) + \left(\frac{\partial u}{\partial p_n} \cdot n_{ij} \right) (\nabla p_n \cdot n_{ij}) \quad (46)$$

We approximate the gradients of u and S_w on the face f_{ij} by

$$\begin{aligned} \nabla S_w|_{f_{ij}}^{k-1} \cdot n_{ij} &\approx \frac{S_{w,i}^{k-1} - S_{w,j}^{k-1}}{\Delta x_{ij}} \\ n_{ij}^T \nabla u|_{f_{ij}}^{k-1} n_{ij} &\approx \frac{(u_i^{k-1} - u_j^{k-1}) \cdot n_{ij}}{\Delta x_{ij}} \end{aligned}$$

We substitute these approximations into **Equation 46** and omit the term involving the gradient of p_n on the right-hand side. Without this simplification, deriving a straightforward numerical approximation of the derivative of u would not be feasible. Moreover, the approximation is primarily intended to capture the capillary effects, for which the omitted term plays only a minor role. This results in

$$\frac{(u_i^{k-1} - u_j^{k-1}) \cdot n_{ij}}{\Delta x_{ij}} \approx \left(\left. \frac{\partial u}{\partial S_w} \right|_{f_{ij}} \cdot n_{ij} \right) \frac{S_{w,i}^{k-1} - S_{w,j}^{k-1}}{\Delta x_{ij}}$$

If $S_{w,i}^{k-1} - S_{w,j}^{k-1} \neq 0$, this can be rearranged to obtain an approximation of the derivative of u with respect to the saturation S_w . Otherwise, the same procedure can be applied using a time derivative in **Equation 46** instead of a spatial derivative. In this case, an approximation can be obtained if $S_{w,f_{ij}}^{k-1} - S_{w,f_{ij}}^{k-2} \neq 0$. In summary, we obtain the approximation

$$\left. \frac{\partial u}{\partial S_w} \right|_{f_{ij}}^{k-1} \cdot n_{ij} \approx D_{f_{ij}}^{u,k-1} := \begin{cases} \frac{(u_i^{k-1} - u_j^{k-1}) \cdot n_{ij}}{S_{w,i}^{k-1} - S_{w,j}^{k-1}}, & \text{if } |S_{w,i}^{k-1} - S_{w,j}^{k-1}| \geq \Delta_s^{\min}, \\ \frac{(u_{f_{ij}}^{k-1} - u_{f_{ij}}^{k-2}) \cdot n_{ij}}{S_{w,f_{ij}}^{k-1} - S_{w,f_{ij}}^{k-2}}, & \text{else if } |S_{w,f_{ij}}^{k-1} - S_{w,f_{ij}}^{k-2}| \geq \Delta_t^{\min}, \\ 0, & \text{else,} \end{cases} \quad (47)$$

where $\Delta_s^{\min} > 0$ and $\Delta_t^{\min} > 0$ are tolerances that ensure the denominators are not too small. The same approximation can also be done with u_D instead of u . In that case, we denote the approximation by $D_{f_{ij}}^{u_D,k-1}$.

Now, we maximize the characteristic wave velocity, **Equation 45**, at face f_{ij} to obtain

$$\begin{aligned} \omega_{ij}^{k,max} &:= \max_{\hat{S}_w \in I_{ij}^k} \left(\left| \frac{\partial f_w}{\partial S_w}(\hat{S}_w) u_{f_{ij}}^{k-1} + \frac{\partial \gamma}{\partial S_w}(\hat{S}_w) u_{D,f_{ij}}^{k-1} + f_w(\hat{S}_w) D_{f_{ij}}^{u,k-1} + \gamma(\hat{S}_w) D_{f_{ij}}^{u_D,k-1} \right| \right), \\ &\approx \max_{\hat{S}_w \in I_{ij}^k} (|\omega_{ij}(\hat{S}_w)|) \end{aligned} \quad (48)$$

where the interval of the maximization is given by

$$I_{ij}^k = [S_{w,i}^{k-1}, S_{w,j}^{k-1}] \cup [S_{w,j}^{k-1}, S_{w,i}^{k-1}] \quad (49)$$

Using this approximation in **Equation 44** leads to the timestep restriction

$$\Delta t_k^{gcw} := \min_{C_i \in \mathbb{V}} \left(\frac{\phi_i C_{CFL}}{\sum_{d=1}^{n_D} \frac{1}{\Delta x_{i,d}} \max_{f_{ij} \in F_{C_i}^d} \omega_{ij}^{k,max}} \right) \quad (50)$$

In this formula, we also maximize with respect to the set $F_{C_i}^d$, which includes the two faces of C_i that are orthogonal to the coordinate axis of space dimension d .

The computational effort required by the timestep criterion is influenced by the performance of the scalar optimization method employed in **Equation 48**, since this maximization must, in principle, be performed at every face of the grid. However, in many simulations, a large number of faces have adjacent cells with nearly identical saturations. In such cases, the optimization step can be omitted by directly using the maximum value calculated from the two saturations of the adjacent cells. In our approach, this shortcut is applied whenever the saturation difference between the two cells is below 10^{-6} . When the difference is greater, we utilize an active set algorithm implementation (4) to carry out the scalar maximization.

We assume that there are no saturations for which both relative permeabilities are zero, and that the derivatives of both relative permeabilities are bounded for $S_w \in [0, 1]$. In Section 2.2 the assumption of bounded derivatives is discussed for the Brooks-Corey relative permeabilities that are used in the examples in Section 3. Under these two assumptions, the maximization in **Equation 48** is well-defined, as it involves maximizing a finite objective function over a finite interval. Moreover, the maximization algorithm cannot diverge, but it may converge to a local maximum rather than the global maximum. To reduce this risk, we perform the maximization starting from three different initial values, these are $S_{w,i}^{k-1}$, $S_{w,j}^{k-1}$ and $\frac{1}{2} (S_{w,i}^{k-1} + S_{w,j}^{k-1})$.

As previously mentioned, we use an active set algorithm (3, 18) to solve the maximization problem. The stopping criterion is that the algorithm terminates when the change in the variable $\hat{S}_w$ between iterations is less than 10^{-6} . Additionally, we set the maximum number of allowed iterations to 1000. We note that this limit was never exceeded in the simulations presented in Section 3.

In the numerical experiments in Section 3, we compare the effectiveness and reliability of the newly developed timestep criterion to already existing timestep criteria for IMPES solver in the literature. We compare it to the **Coats criterion** (11) and the criterion explained by Lamine and Edwards (25), which we refer to as the **characteristic velocity criterion**.

The timestep criterion given by **Equation 50** is based on a similar idea as the characteristic velocity criterion. The difference is that in the characteristic velocity criterion, the terms involving the derivatives of the velocities u and u_D in Equation 45 are not taken into account. Accordingly, the numerical approximations of these velocity derivatives are not needed.

The velocities u and u_D are dependent on the saturation through the relative permeabilities and the capillary pressure function. As the capillary pressure function varies strongly with the saturation, it is expected that these two criteria lead to significantly different timestep sizes when capillary effects are important for the flow.

The Coats criterion is derived from a Neumann stability analysis. For two-phase flow, the criterion is given by

$$\Delta t_k^{Coats} := \min_{C_i \in \mathbb{V}} \left(\frac{\phi_i |C_i| C_{stab}}{F_{i,Coats}^k} \right)$$

$$F_{i,Coats}^k := \sum_{f_{ij} \in F_{C_i}} |\theta_{ij,Coats}^k|$$

$$\theta_{ij,Coats}^k := |f_{ij}| \left(A_{f_{ij},Coats}^{k-1} |u_{w,f_{ij}}^{k-1}| + B_{f_{ij},Coats}^{k-1} |u_{n,f_{ij}}^{k-1}| + C_{f_{ij},Coats}^{k-1} \left(\frac{\partial p_{C,i}^{k-1}}{\partial S_w} + \frac{\partial p_{C,j}^{k-1}}{\partial S_w} \right) \right)$$

The coefficients are defined as

$$A_{Coats} := \frac{M_n}{M M_w} \frac{\partial M_w}{\partial S_w}$$

$$B_{Coats} := \frac{M_w}{M M_n} \frac{\partial M_n}{\partial S_n}$$

$$C_{Coats} := -\frac{K_0}{d_{ij}} \frac{M_n M_w}{M}$$

The coefficients are computed at timestep $k-1$ on face f_{ij} using upwinding. This upwinding is based on the non-wetting phase velocity u_n^{k-1} when $M_n^{k-1} \neq 0$. If $M_n^{k-1} = 0$, the wetting phase velocity u_w^{k-1} is used instead.

Alongside any of the timestep criteria, we enforce a limit on the maximum relative increase of the timestep size in one time iteration. The parameter $\tau_{max} > 0$ sets this maximum allowed relative increase. This constraint prevents the solver from enlarging the timestep too abruptly, which might lead to instabilities.

If Δt_k^{stab} is the timestep size recommended by the criterion and Δt_{k-1} is the previous timestep size, we select

$$\Delta t_k := \min \{ \Delta t_k^{stab}, (\tau_{max} + 1) \Delta t_{k-1} \} \quad (51)$$

as the final timestep size.

2.3.6. Typical Boundary Conditions

In this section, we present the boundary conditions used for the two-phase Darcy equations. The velocity is uniquely determined by the saturation and pressure. Therefore, boundary conditions for the velocity are generally unnecessary. However, for wall boundaries, we prescribe zero flux across the boundary.

Let f_{ij} be a outer boundary next to the cell C_i . For simplicity, we introduce an imaginary cell C_j outside the grid, positioned on the opposite side of the face f_{ij} , that has the same size as C_i .

At **wall** boundaries, we set

$$u_{f_{ij}} = u_{D,f_{ij}} = u_{w,f_{ij}} = u_{n,f_{ij}} = 0$$

As **symmetric** boundary conditions, we indicate

$$\nabla p_{n,f_{ij}} \cdot n_{ij} = 0$$

$$\nabla S_{w,f_{ij}} \cdot n_{ij} = 0$$

At an **outlet** boundary, we prescribe

$$\nabla S_{w,f_{ij}} \cdot n_{ij} = 0$$

together with a Dirichlet boundary condition for the pressure p_n . In most cases, the prescribed boundary value is $10^5 Pa$, corresponding to atmospheric pressure.

At an **inlet** boundary, we set

$$S_{w,fij} = 1$$

as the saturation boundary condition. In most experiments, we also apply a Dirichlet boundary condition for the pressure, setting the boundary pressure value equal to or higher than that at the inlet boundary.

The example presented in Section 3.2 is an exception. In this case, a constant inflow velocity, $u_{In} > 0$, is prescribed at the inlet. Since gravity and capillary forces are not considered in this example, we obtain

$$u_{In} = MK_0 \nabla p_{n,fij} \Leftrightarrow \nabla p_{n,fij} = \mu_w K_0^{-1} u_{In} \quad (52)$$

Equation 52 implements the constant inflow velocity condition through a Neumann boundary condition on the pressure.

3. RESULTS AND DISCUSSION

In the following sections, we provide numerical experiments for testing and validating the two-phase Darcy solver. The examples include scenarios involving pressure drop dominated flow, capillary dominated flow, flow with compressible fluid phases, and flow featuring discontinuous material parameters. Additionally, we compare the newly introduced timestep criterion from Section 2.3.5 with both the Coats criterion and the characteristic wave velocity criterion. Unless otherwise specified, all subsequent simulations employ the generalized characteristic wave velocity criterion together with the relative increase restriction on the timestep size from **Equation 51**. Unless otherwise indicated, the parameters are set to $\tau_{\max} = 0.01$, $C_{\text{stab}} = 1$, and $\Delta_s^{\min} = \Delta_t^{\min} = 10^{-4}$.

3.1. Capillary Rise

The first example is a capillary rise experiment. The goal of this example is to assess the effectiveness of the timestep criteria in stabilizing capillary dominated flows.

Table 1: Both fluid phases are assumed to be incompressible. ϕ is the porosity and K_0 the absolute permeability of the porous material. μ_w and μ_n are the viscosities, and ρ_w and ρ_n are the densities, of the wetting and the non-wetting phase, respectively.

ϕ	K_0	μ_w	μ_n	ρ_w	ρ_n
0.4	$5.8 \cdot 10^{-13} m^2$	$6.72 \cdot 10^{-2} Pas$	$1.76 \cdot 10^{-5} Pas$	$920 \frac{kg}{m^3}$	$1.22 \frac{kg}{m^3}$

We simulate the capillary rise in a $0.1m$ high column that is initially filled with air. Gravity is directed in the negative height direction and the wetting phase enters the column from the bottom. Therefore, the bottom boundary serves as an inlet, while the top boundary is an outlet. We set the same Dirichlet pressure values at both the inlet and outlet. The physical parameters are summarized in **Table 1**. The non-wetting phase is air, and the wetting phase corresponds to a light polymer resin. Relative permeabilities are described using the simplified Brooks-Corey functions with $m^{w,BC} = m^{n,BC} = 4$. The capillary pressure is a Van Genuchten function with parameters $p_e^{VG} = 17.7kPa$ and $m^{VG} = 0.74$. The simulation is performed with $C_{\text{stab}} = 1$ applying all three timestep criteria. The computational domain uses a two-dimensional grid with 100 cells in height and 10 cells in width. Symmetric boundary conditions are set on the left and right boundaries of the geometry. Since the setup is uniform in the width direction, results are presented as a one-dimensional profile along the height.

Figure 2 shows the saturation profiles along the height after 10000s of all three simulations. The characteristic wave velocity criterion exhibits significant oscillations, whereas the results from both the generalized characteristic wave velocity criterion and Coats criterion are nearly identical and free of oscillations. The results clearly highlight the limitations of the characteristic wave velocity

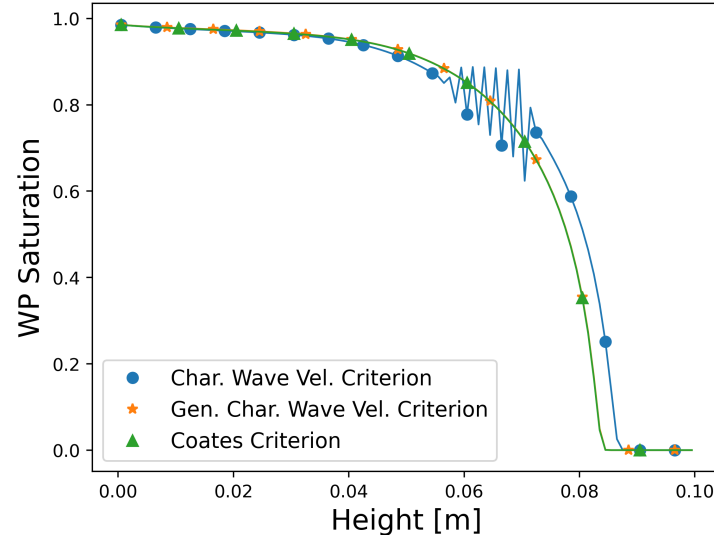


Figure 2: The image displays the saturation profiles from the capillary rise simulations at 10000s. The results were obtained using the characteristic wave velocity criterion, the generalized characteristic wave velocity criterion, and the Coates criterion. The grid used measures 10×100 voxels.

criterion in stabilizing flows dominated by capillarity, and the results confirm that the additional terms in the generalized characteristic wave velocity criterion enhances its ability the stabilize capillary dominated flows.

3.2. Buckley-Leverett Problem

To validate the IMPES solver for pressure drop dominated flows, we apply it to the Buckley-Leverett problem. This problem considers one-dimensional flow driven by a pressure drop. Capillary pressure effects and gravity are not considered. As demonstrated by Buckley and Leverett (7), an analytic solution exists that can be calculated. Therefore, the Buckley-Leverett problem is well suited for validating numerical two-phase flow solvers in the case of pressure drop dominated flows.

Table 2: Both fluid phases are assumed to be incompressible. ϕ is the porosity and K_0 the absolute permeability of the porous material. μ_w and μ_n are the viscosities of the wetting and the non-wetting phase, respectively.

ϕ	K_0	μ_w	μ_n
0.4	$5 \cdot 10^{-13} m^2$	$1 \cdot 10^{-4} Pas$	$1 \cdot 10^{-4} Pas$

The experiment uses a one-meter-long geometry with an inlet at the left end and an outlet at the right end. Initially, the geometry is filled with the non-wetting phase. The viscosities of both phases are chosen to be equal so that the saturation at the shock front in the analytical solution is significantly less than one. In this case, the rarefaction wave part of the analytic solution is clearly visible. This would not be the case if the viscosity of the non-wetting phase were much smaller than that of the wetting phase. A constant inflow velocity of $2.5 \cdot 10^{-4} \frac{m}{s}$ is imposed at the inlet as in **Equation 52**. The physical parameters are listed in **Table 2**. Moreover, we use simplified Brooks-Corey relative permeabilities with $m^{w,BC} = m^{n,BC} = 4$. Similar to the previous example, the simulations are performed on a two-dimensional grid with symmetric boundary conditions on the additional boundaries. Since the setup and results are uniform in this direction, only the results along the non-constant direction are presented.

Figure 3 presents both the analytic and numerical solutions of the Buckley-Leverett problem at various times. The analytic solution consists of a shock wave followed by a rarefaction wave and the numerical solution 3 demonstrates that the presented IMPES solver closely matches the analytic solution. The greatest numerical error appearing right at the shock front.

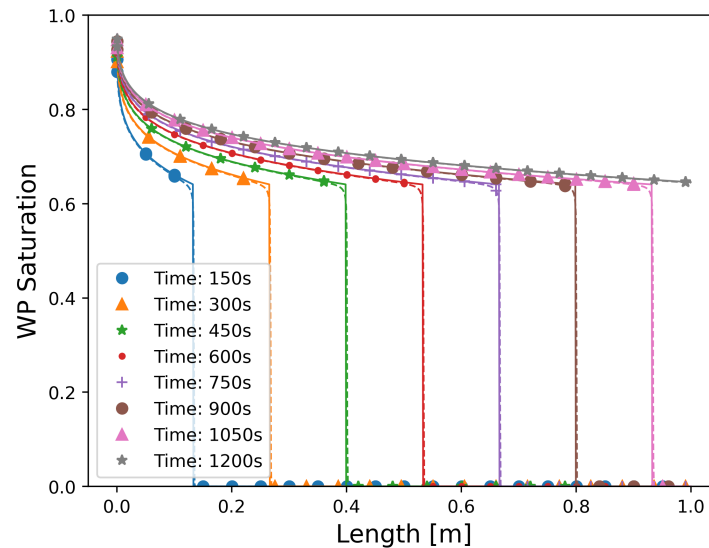


Figure 3: The numerical and analytic solutions of the Buckley-Leverett problem at various times are shown. Solid lines correspond to the analytic solution, while dashed lines indicate the numerical results. The geometry is discretized with a voxel size of $10^{-3}m$, and the simulations are performed using $C_{stab} = 1$. "WP" is an abbreviation for wetting phase.


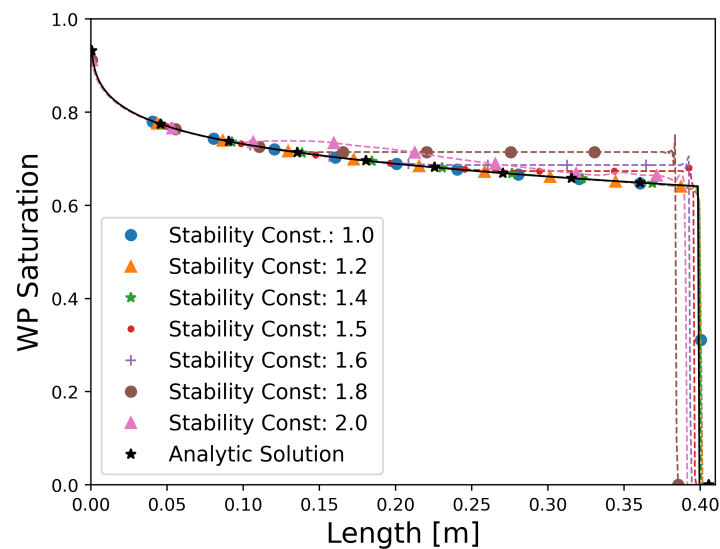


Figure 4: This image shows both the analytic and numerical solutions of the Buckley-Leverett problem at time $t = 450s$. The geometry is discretized with a voxel size of $10^{-3}m$ and the numerical solutions are computed using various stability constants C_{stab} . "WP" is an abbreviation for wetting phase.

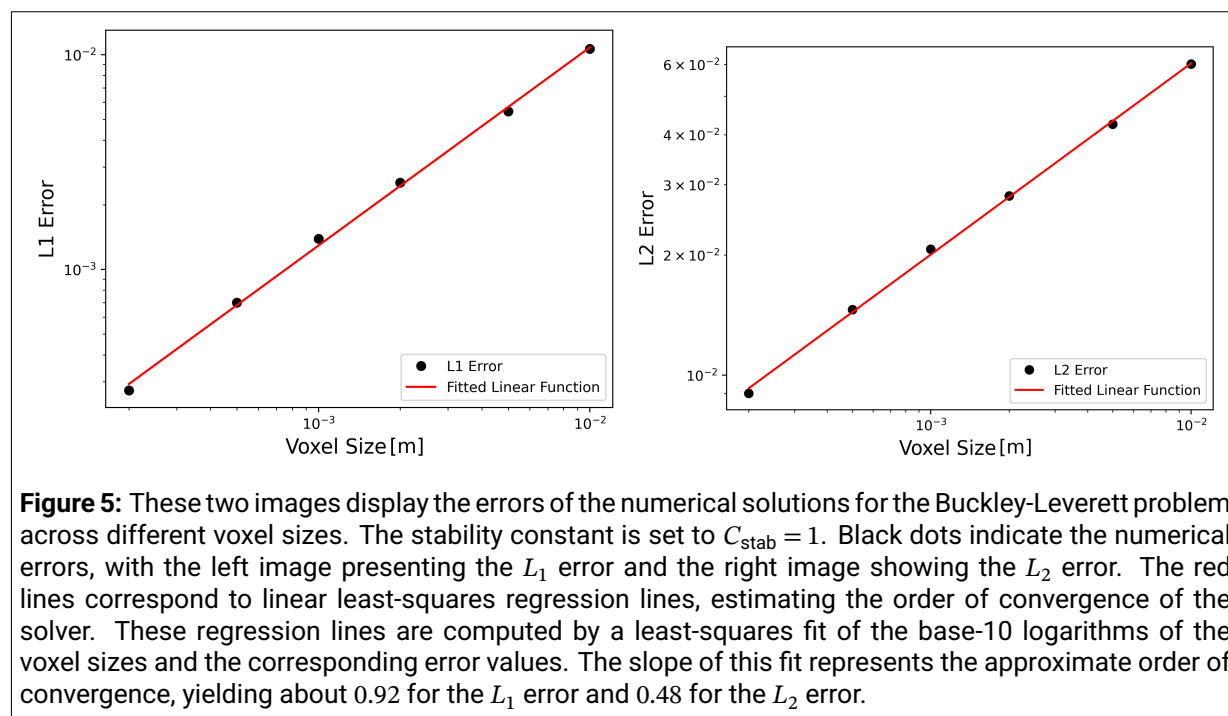

In **Figure 4**, the analytic solution at time $t = 450\text{s}$ is compared with numerical solutions using stability constants between 1 and 2. The figure shows that numerical results remain stable up to a stability constant of 1.4, while higher values lead to oscillations near the shock front.

Figure 5 displays the L_1 and L_2 errors of the numerical solutions over different voxel sizes. For this example, errors are calculated by comparing the wetting phase saturation values to the analytic solution at 101 equidistant time steps between $t = 0$ and $t = 1500\text{s}$. The maximum difference across all time steps is reported as the overall error of the numerical solution. The order of convergence is estimated by a linear least-squares fit, yielding about 0.92 for the L_1 error and 0.48 for the L_2 error.

To compare the timestep criteria, the setup is simulated using all three timestep criteria with various stability constants C_{stab} . **Table 3** shows the error and timestep statistics from these simulations. In these simulations, $\tau_{\text{max}} = 0.3$ is used. This allows the timestep size to increase up to a 30% between consecutive time iterations to reduce the impact of this parameter on the comparison. To measure the computational effort, the tables list the total number of time iterations and the average timestep size, calculated as the arithmetic mean of all timestep sizes. Accuracy is assessed through the L_1 and L_2 norms measuring the difference from the analytic solution.

A comparison of the L_1 and L_2 errors in **Table 3** of the generalized characteristic wave velocity criterion with the saturation profiles in **Figure 4** reveals that the increase in errors aligns with the onset of oscillations for $C_{\text{stab}} > 1.4$. Both characteristic wave velocity criteria maintain stability up to $C_{\text{stab}} = 1.4$, whereas the Coats criterion remains stable up to $C_{\text{stab}} = 1.5$. The two characteristic wave velocity criteria behave similarly on this example. The absence of capillary effects likely results in relatively small saturation derivatives of velocities u and u_D , making these two criteria similar.

At $C_{\text{stab}} = 1.0$, the Coats criterion requires approximately 19% less time iterations than the generalized characteristic wave velocity criterion. When comparing each criterion at its maximum stable value of C_{stab} , the difference in total iterations is minimal. However, identifying this precise stability constant for which a timestep criterion is barely stable is usually impractical for larger and more complex applications. Moreover, such stability constants are typically chosen with some "safety distance".

Table 3: These tables list the errors in the L_1 norm, the errors in the L_2 norm, the total number of time iterations, and the arithmetic mean of all timestep sizes for simulations of the Buckley-Leverett problem. The first table uses the Coats criterion, the second table uses the characteristic wave velocity criterion, and the last table uses the generalized characteristic wave velocity criterion. In each case, a range of values for the stability constant C_{stab} is tested. All simulations were performed with $\tau_{max} = 0.3$, an initial timestep size of $1 \cdot 10^{-2}s$, and a voxel size of $10^{-3}m$.

Coats Criterion

C_{stab}	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7
L_1 Error in $[10^{-3}]$	1.33	1.01	1.03	1.01	0.78	0.78	673	646
L_2 Error in $[10^{-2}]$	1.97	1.80	1.87	1.97	1.53	1.43	69.1	67.2
Total Iter. Nb.	4076	3389	3179	2900	2424	2396	82	128
Average Δt in $[s]$	0.37	0.44	0.47	0.52	0.62	0.63	18.32	11.96

Characteristic Wave Velocity Criterion

C_{stab}	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7
L_1 Error in $[10^{-3}]$	1.28	1.23	1.17	1.07	0.80	12.3	22.4	35.4
L_2 Error in $[10^{-2}]$	1.99	1.97	1.99	2.03	1.67	6.24	8.58	10.9
Total Iter. Nb.	3414	3105	2847	2628	2466	2186	2015	1873
Average Δt in $[s]$	0.44	0.48	0.53	0.57	0.61	0.69	0.75	0.80

Generalized Characteristic Wave Velocity Criterion

C_{stab}	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7
L_1 Error in $[10^{-3}]$	1.28	1.23	1.17	1.06	0.83	12.3	22.4	35.4
L_2 Error in $[10^{-2}]$	1.99	1.97	1.99	2.03	1.64	6.24	8.58	10.9
Total Iter. Nb.	3422	3114	2855	2635	2476	2214	2063	1948
Average Δt in $[s]$	0.44	0.48	0.53	0.57	0.61	0.68	0.73	0.77

In summary, the introduced solver accurately captures the pressure drop dominated flow of the Buckley-Leverett problem. Additionally, the Coats criterion needs approximately 19% more time iterations than the newly proposed timestep criterion, while maintaining a similar accuracy. Moreover, it needs a similar number of time iterations as the characteristic wave velocity criterion.

Using the same hardware and number of threads, the simulation with the generalized characteristic wave velocity criterion and $C_{stab} = 1$ takes 193.87s, whereas the simulation with the Coats criterion takes 229.57s. Thus, the generalized characteristic wave velocity criterion requires approximately 16% less runtime than the Coats criterion. This demonstrates that the generalized characteristic wave velocity criterion is not significantly more computationally complex than the Coats criterion.

3.3. Capillary Gravity Equalization

In this section, we assess the IMPES solver using an example where flow is driven by capillary pressure and gravity. This example was also used by Horgue et al. (20) to test a numerical solver.

The geometry is two-dimensional, measuring 0.1m in width and 1m in height, and filled with a homogeneous porous medium. On the bottom, right, and left boundaries, we impose wall boundary conditions. At the top boundary, Dirichlet conditions are applied for both pressure and saturation, with pressure fixed at $10^5 Pa$ (atmospheric pressure) and saturation set to 10^{-6} . Initially, the saturation is 0.5 in the lower half and 10^{-6} in the upper half of the geometry. The gravity is directed in the negative height direction.

The simulations employ the physical parameters listed in Table 4 and simplified Brooks-Corey relative permeabilities with $m^{w,BC} = m^{n,BC} = 2$. The non-wetting phase is air and the wetting phase corresponds to a light polymer resin. We consider two simulation cases. The first uses a

Table 4: Both fluid phases are assumed to be incompressible. ϕ is the porosity and K_0 the absolute permeability of the porous material. μ_w and μ_n are the viscosities, and ρ_w and ρ_n are the densities, of the wetting and the non-wetting phase, respectively.

ϕ	K_0	μ_w	μ_n	ρ_w	ρ_n
0.5	$1 \cdot 10^{-11} m^2$	$6.72 \cdot 10^{-2} Pa \cdot s$	$1.76 \cdot 10^{-5} Pa \cdot s$	$920 \frac{kg}{m^3}$	$1.22 \frac{kg}{m^3}$

Van Genuchten capillary pressure function with parameters $p_e^{VG} = 100 Pa$ and $m^{VG} = 0.5$, while the second uses a Brooks-Corey capillary pressure function with $p_e^{BC} = 1000 Pa$ and $m^{BC} = 2$.

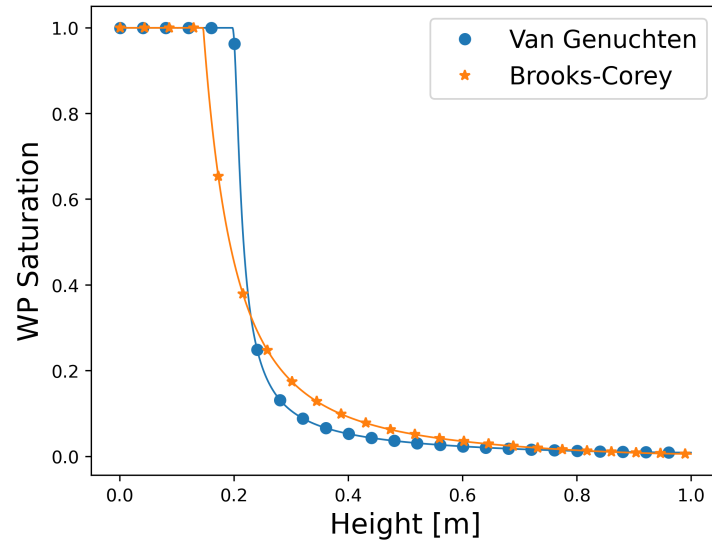


Figure 6: This image depicts the stationary wetting-phase (WP) saturation fields from the numerical solutions. "Van Genuchten" refers to the use of the Van Genuchten capillary pressure function with parameters $p_e^{VG} = 100 Pa$ and $m^{VG} = 0.5$, while "Brooks-Corey" indicates the Brooks-Corey capillary pressure function with $p_e^{BC} = 1000 Pa$ and $m^{BC} = 2$. The grid used for the simulations consists of 10×1000 voxels.

We simulate the setup for $2 \cdot 10^6 s$. By this time, the system is nearly in its stationary state. In the stationary state, it is

$$u_w = u_n = 0. \quad (53)$$

We use **Equation 53** together with **Equation 2** in the height direction, which we denote by h in the following formulas. This yields

$$\frac{\partial p_n}{\partial h} = \rho_n g, \quad (54)$$

$$\frac{\partial p_w}{\partial h} = \rho_w g \Leftrightarrow \frac{\partial p_c}{\partial h} = \frac{\partial p_n}{\partial h} - \rho_w g \quad (55)$$

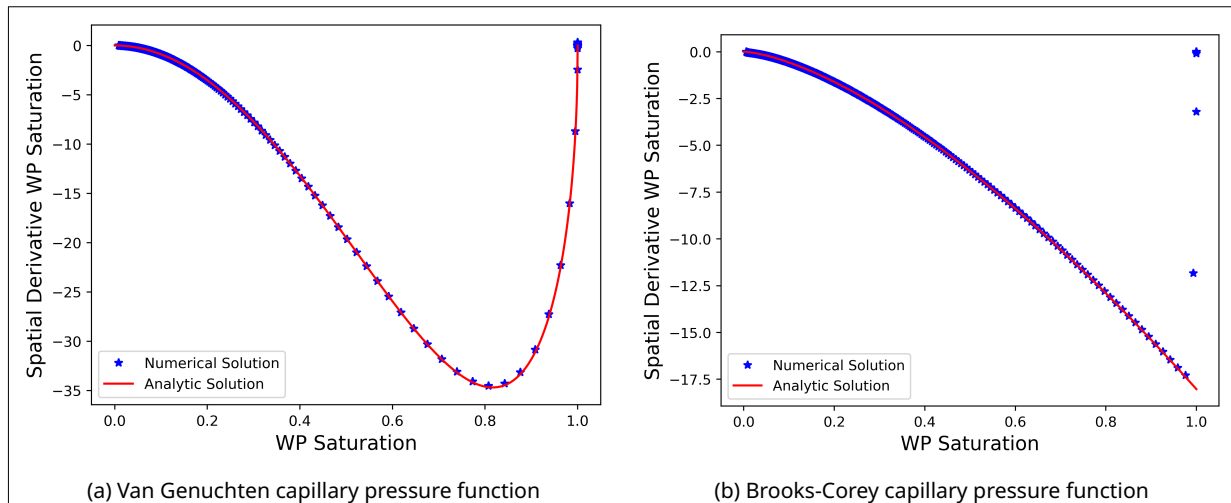


Figure 7: These images show the derivatives of the wetting phase (WP) saturations with respect to the height plotted against the wetting phase saturation. The numerical derivatives are computed from the saturation values obtained in the simulations, as shown in **Figure 6**. The analytic derivatives are calculated by evaluating the right-hand side of **Equation 56**. The left image (a) uses the Van Genuchten capillary pressure model, while the right (b) uses the Brooks-Corey model. The grid consists of 10×1000 voxels.

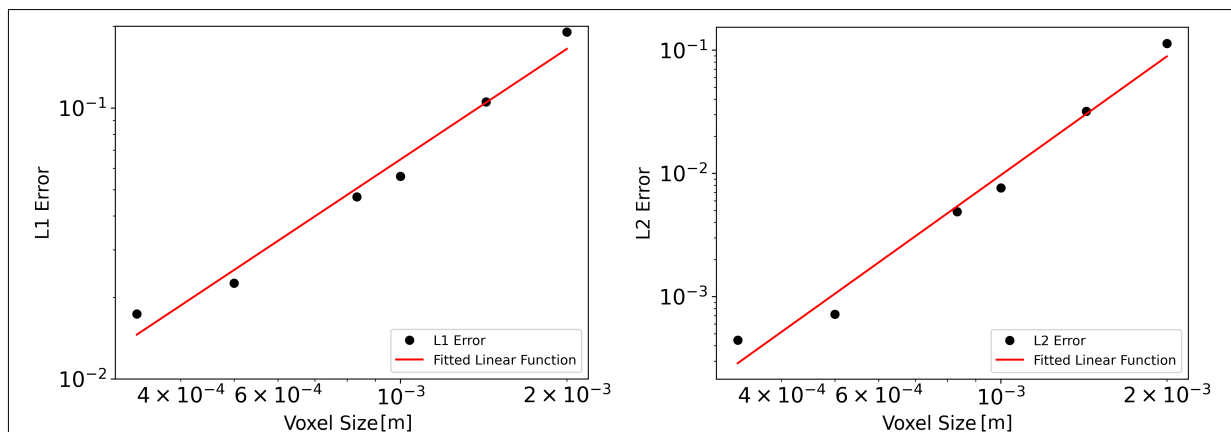


Figure 8: These two images illustrate the deviation of the numerically computed derivative of the wetting phase saturation with respect to height from the analytic formula given in **Equation 56** for various voxel sizes. The derivatives for a voxel size of $10^{-3}m$ are shown in **Figure 7**. The error is measured with the L_1 norm in the left image and the L_2 norm in the right image. The Van Genuchten capillary pressure model was used. Numerical errors are represented by black dots, while the red lines correspond to linear least-square regression lines, estimating the order of convergence. The approach to fit these linear regression lines from the error values is the same as in **Figure 5**. The calculated orders of convergence are 1.35 for the L_1 error and 3.20 for the L_2 error. It should be noted that these are the orders of convergence of the numerically calculated derivative of the saturation with respect to the height and not directly the convergence order of the numerical solution.

Inserting **Equation 54** into **Equation 55** and using the chain rule leads to

$$\frac{\partial S_w}{\partial h} = \frac{(\rho_n - \rho_w)g}{\frac{\partial p_c}{\partial S_w}}. \quad (56)$$

By evaluating the right-hand side of **Equation 56** at chosen saturation values, the derivative of the saturation field in the height direction can be calculated analytically. The stationary states of the numerical solutions are validated by computing this derivative numerically and comparing it to the analytic result.

Table 5: These tables list the errors in the L_1 norm, the errors in the L_2 norm, the total number of time iterations, and the arithmetic mean of all timestep sizes for simulations of the capillary gravity equalization problem. The L_1 and L_2 errors are determined by the subtraction of the analytic and numerical derivatives of the wetting phase saturation with respect to height in the stationary state. The first table uses the Coats criterion, the second table uses the characteristic wave velocity criterion, and the last table uses the generalized characteristic wave velocity criterion. In each case, a range of values for the stability constant C_{stab} is tested. All simulations were performed with $\tau_{max} = 0.3$, an initial timestep size of $1 \cdot 10^{-3}s$ and a grid consisting of 10×1000 voxels.

Coats Criterion

C_{stab}	0.7	0.8	0.9	1.0	1.25	1.5	2	3.0	3.5
L_1 Error in $[10^{-2}]$	5.68	5.67	5.66	5.65	5.63	5.60	5.55	5.69	15.0
L_2 Error in $[10^{-2}]$	0.77	0.77	0.76	0.76	0.76	0.76	0.75	0.77	4.44
Total Iter. Nb. in $[10^5]$	10.86	9.51	8.46	7.61	6.14	5.69	5.13	2.55	2.59
Average Δt in $[s]$	1.84	2.10	2.37	2.63	3.26	3.51	3.90	7.84	7.72

Characteristic Wave Velocity Criterion

C_{stab}	0.7	0.8	0.9	1.0	1.25	1.5	2	3.0	3.5
L_1 Error in $[10^{-2}]$	7.79	9.52	10.5	18.5	23.8	27.4	72.0	22.3	172
L_2 Error in $[10^{-2}]$	1.38	1.86	1.86	5.13	8.06	9.57	61.9	8.60	930
Total Iter. Nb. in $[10^5]$	2.40	2.81	3.41	3.53	3.37	3.29	3.43	3.75	3.90
Average Δt in $[s]$	8.33	7.11	5.86	5.66	5.93	6.08	5.84	5.33	5.12

Generalized Characteristic Wave Velocity Criterion

C_{stab}	0.7	0.8	0.9	1.0	1.25	1.5	2	3.0	3.5
L_1 Error in $[10^{-2}]$	5.49	5.81	6.95	6.72	7.94	11.4	24.9	73.3	50.1
L_2 Error in $[10^{-2}]$	0.83	1.00	1.33	1.23	1.44	2.10	8.58	65.8	29.6
Total Iter. Nb. in $[10^5]$	1.98	2.16	2.31	2.46	2.64	2.70	3.08	3.42	3.36
Average Δt in $[s]$	10.12	9.27	8.66	8.12	7.59	7.40	6.50	5.85	5.95

Figure 6 displays the stationary saturation fields of the numerical solutions for both cases, and **Figure 7** presents the saturation derivatives with respect to height, calculated numerically and analytically. This comparison illustrates a strong agreement between the numerical and analytic stationary states in both cases.

In the Brooks-Corey scenario, the numerical derivative differs from the analytic one for saturation values close to one. This difference arises from the nearly constant saturation region near height zero and the sharp edge at its end in the numerical solution. Within this region, the saturation shows a small gradient up to the sharp edge, which causes the small derivative values for saturation values close to one. This effect is not present in the analytic solution. These deviations might decrease for extended simulation times, as the numerical solutions slowly approach their stationary state.

Figure 8 illustrates the deviation of the numerical saturation derivative from the analytic derivative for various voxel sizes, using the Van Genuchten capillary pressure model. We estimate convergence orders of 1.35 for the L_1 error and 3.20 for the L_2 error. Note that these convergence orders refer to the saturation derivative with respect to height rather than the numerical solution itself.

We similarly compare the timestep criteria as in the Buckley-Leverett section. The error and timestep statistics of these simulations are provided in **Table 5** to evaluate the accuracy and computational cost. Unlike the Buckley-Leverett example, here the L_1 and L_2 errors are computed based on the difference between the numerical and analytic derivatives of the wetting phase saturation with respect to height in the stationary state.

The generalized characteristic wave velocity criterion has notably lower errors and fewer time iterations compared to the characteristic wave velocity criterion.

When comparing the Coats criterion to the generalized characteristic wave velocity criterion, the Coats criterion yields slightly smaller errors but requires substantially more time iterations. For instance, at $C_{stab} = 1$, the L_1 error of the Coats criterion is approximately 16% lower but demands over 3 times the number of time iterations. Lowering C_{stab} to 0.7 or 0.8 produces similar errors for both criteria. Increasing the stability constant of the Coats criterion, for example to $C_{stab} = 3$, can bring its time iteration count close to that of the generalized characteristic wave velocity criterion at $C_{stab} = 1$. But again this requires prior knowledge of the appropriate stability constant, which is rarely available in practical applications.

In conclusion, the solver accurately reproduces the known stationary state of the flow that is driven by gravity and capillary forces. Furthermore, the generalized characteristic velocity criterion effectively limits the timestep size in this example, requiring significantly fewer time iterations than the other timestep criteria, while having a good agreement with the analytic stationary state.

Comparing runtimes again, the generalized characteristic wave velocity criterion with $C_{stab} = 1$ takes 12,284s, while the Coats criterion takes 32,231s. Thus, the runtime of the Coats criterion is approximately 2.6 times longer than that of the generalized characteristic wave velocity criterion. This is slightly less than three times as many time iterations, but still represents a significant improvement.

3.4. Compression of Gas

In this section, we use the two-dimensional geometry shown in **Figure 9**, measuring $1m$ in width and $0.1m$ in length. The left boundary is an inlet boundary and the other three boundaries are wall boundaries. Initially, the geometry is filled with air at atmospheric pressure, i.e., $10^5 Pa$. Capillary pressure and gravity are not considered in this example. At the inlet, various pressure values p_I are prescribed as Dirichlet boundary conditions, all greater than $10^5 Pa$. As a result, the wetting phase enters the porous medium by compressing the air inside. Without capillary pressure and gravity effects, the wetting phase does not spread through the porous medium. Consequently, the gas compression continues until its internal pressure matches the inlet pressure.

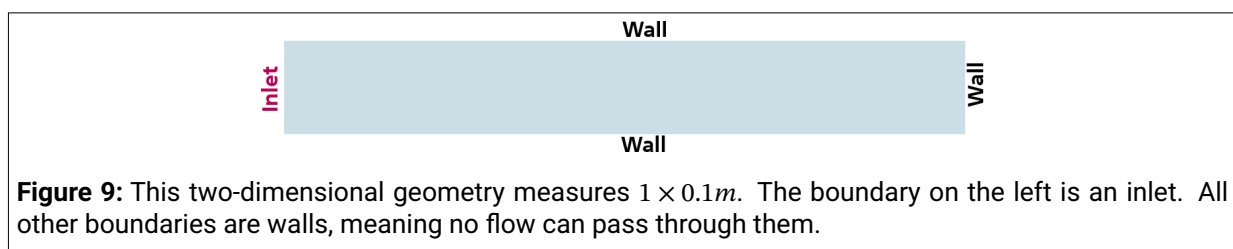


Figure 9: This two-dimensional geometry measures $1 \times 0.1m$. The boundary on the left is an inlet. All other boundaries are walls, meaning no flow can pass through them.

Table 6: The ideal gas law, **Equation 7**, is used to model the compressibility of the non-wetting phase. R_n denotes the gas constant and ρ_n^{ref} the reference density of the non-wetting phase at reference pressure p_n^{ref} . The wetting phase is assumed to be incompressible. ϕ is the porosity and K_0 the absolute permeability of the porous material. μ_w and μ_n are the viscosities of the wetting and the non-wetting phase, respectively.

ϕ	K_0	μ_w	μ_n	ρ_n^{ref}	p_n^{ref}	R_n
0.6	$4 \cdot 10^{-12} m^2$	$1 \cdot 10^{-4} Pa s$	$1.76 \cdot 10^{-5} Pa s$	$1.22 \frac{kg}{m^3}$	$10^5 Pa$	$10^5 Pa$

In this example, the physical parameters listed in **Table 6** are used, and the ideal gas law, **Equation 7**, is applied to model the compressibility of air. Simplified Brooks-Corey relative permeabilities with

$m^{w,BC} = m^{n,BC} = 4$ are employed and all simulations in this section utilize a grid of the size 1000×10 voxels.

The area occupied by the wetting phase in the stationary state can be determined by calculating the compression of the non-wetting phase at the inlet pressure p_I . For this, we divide the non-wetting phase density at the initial pressure by the non-wetting phase density at the inlet pressure p_I , resulting in

$$\frac{\rho_n(10^5 Pa)}{\rho_n(p_I)} \stackrel{\text{Eq. 7}}{=} \frac{\rho_n^{ref}}{\rho_n^{ref} + \frac{1}{R_n} (p_I - 10^5 Pa) \rho_n^{ref}} = \frac{1}{1 + \frac{p_I - 10^5 Pa}{R_n}} \stackrel{\text{Table 6}}{=} \frac{10^5 Pa}{p_I} \quad (57)$$

For example, when $p_I = 2 \cdot 10^5 Pa$, the ratio from **Equation 57** equals 0.5, meaning the non-wetting phase compresses to half of its original area, allowing the wetting phase to fill the remaining half of the geometry.


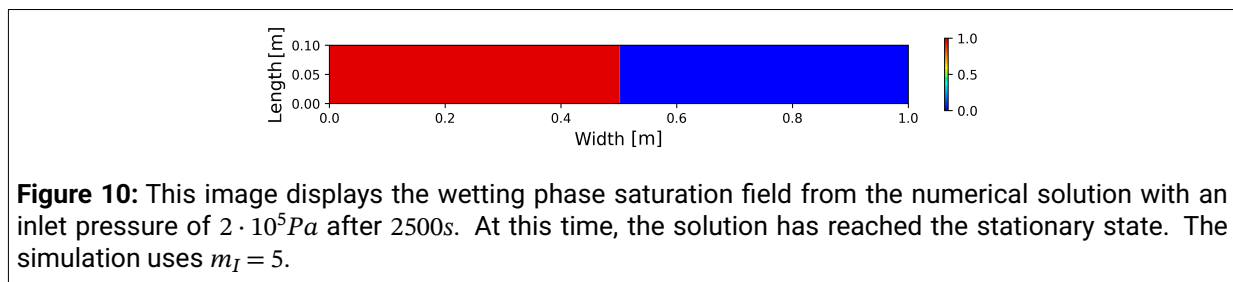


Figure 10 shows the saturation field of the numerical solution in the stationary state with an inlet pressure of $2 \cdot 10^5 Pa$. According to **Equation 57**, the wetting phase is expected to occupy half of the geometry, which closely matches the numerical result.

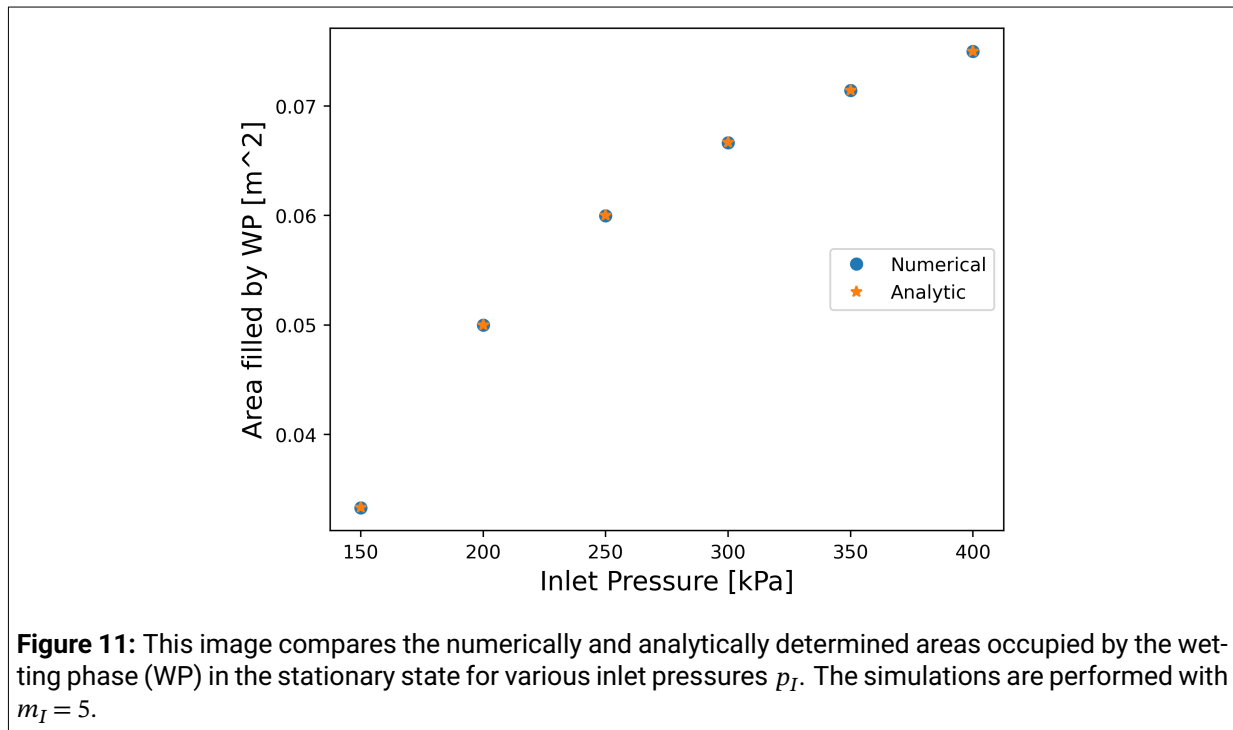

In **Figure 11**, the stationary wetting-phase areas obtained from the numerical solutions for various inlet pressures p_I are compared with the analytical predictions, showing good agreement between them.

Table 7: This table shows the relative errors in the non-wetting phase mass for different numbers of IMplicit Pressure Explicit Saturation (IMPES) iterations m_I and two discretizations. The "Total Mobility" approach employs $\overline{MK}_0^{H,f_{ij}}$ in the discrete total velocity u , whereas the "Phase Mobility" approach uses $\overline{M}_w \overline{K}_0^{H,f_{ij}} + \overline{M}_n \overline{K}_0^{H,f_{ij}}$. Both discretizations were discussed in Section 2.3.3.

	$m_I = 1$	$m_I = 2$	$m_I = 3$	$m_I = 4$	$m_I = 5$	$m_I = 6$	$m_I = 7$
Total Mob.	$1.36 \cdot 10^{-3}$	$1.04 \cdot 10^{-2}$	$1.22 \cdot 10^{-4}$	$1.26 \cdot 10^{-3}$	$3.43 \cdot 10^{-5}$	$4.62 \cdot 10^{-4}$	$7.65 \cdot 10^{-5}$
Phase Mob.	$1.57 \cdot 10^{-3}$	$4.00 \cdot 10^{-2}$	$8.43 \cdot 10^{-4}$	$1.30 \cdot 10^{-3}$	$5.24 \cdot 10^{-4}$	$1.43 \cdot 10^{-3}$	$3.48 \cdot 10^{-4}$

The non-wetting phase mass should remain constant over time since it is trapped within the geometry. However, numerical errors cause variations in the non-wetting phase mass. **Table 7** lists the relative deviations of the non-wetting phase mass from its initial value for $m_I = 1$ to $m_I = 7$, where m_I is the number of IMPES iterations. The table also compares the non-wetting phase mass errors for two discretizations of the total velocity u . Both discretizations are explained in Section 2.3.3. In this section, relative deviations are computed by evaluating the non-wetting phase mass at 101 equally distributed timesteps between 0 and 2500s. This non-wetting phase mass is then subtracted by the initial non-wetting phase mass, and divided by the initial non-wetting phase mass. The maximum deviation among these times is reported as the overall deviation of the simulation.

Table 7 shows a superior mass conservation of the "Total Mobility" discretization, which is why we generally use this discretization in the IMPES solver.

Furthermore, **Table 7** reveals that increasing the number of IMPES iterations generally decreases the error in non-wetting phase mass conservation up to $m_I = 5$. Beyond this, the error does not decrease further or may even increase. The iterative method also performs better for odd values of m_I . The errors for even values still decrease with increasing m_I , but the errors are larger than those of the preceding odd value of m_I . We do not have a definitive explanation for this behavior. It is possible that the solution oscillates around the correct total mass value with each IMPES iteration, and that the overshoots at even values of m_I are larger than those at odd values.

Table 8 compares the three timestep criteria. It presents the total number of time iterations, average timestep size, and, for this example, the relative deviation of the non-wetting phase mass for various values of the stability constant C_{stab} .

For this example, the characteristic wave velocity criterion and the generalized characteristic wave velocity criterion again lead to similar results. At $C_{stab} = 1$, the Coats criterion results in a relative error of the non-wetting phase mass that is about 17.7 times larger than that of the generalized characteristic wave velocity criterion, while requiring only about 8.8% fewer time iterations. Although the Coats criterion can achieve similarly low errors at smaller stability constants, the total number of iterations then exceeds that of the generalized characteristic wave velocity criterion at $C_{stab} = 1$.

This demonstrates that the solver and the newly proposed timestep criterion are applicable to compressible fluid phases. For compressible phases, using $m_I = 5$ is recommended to reduce errors in the non-wetting phase mass. The new timestep criterion using $C_{stab} = 1$ also results in significantly lower non-wetting phase mass errors compared to the Coats criterion.

3.5. Discontinuity of Material Parameters

In this section, the solver is tested on an example featuring discontinuous material parameters. The geometry depicted in **Figure 12** is used, with different material parameters assigned to the two porous media. Wall boundary conditions are applied on all outer boundaries, preventing any

Table 8: These tables list the relative error in the mass of the non-wetting phase (NWP), the total number of time iterations (Iter. Nb.), and the arithmetic mean of all timestep sizes (Average Δt) for simulations of the gas compression example. The first table uses the Coats criterion, the second table uses the characteristic wave velocity criterion, and the last table uses the generalized characteristic wave velocity criterion. In each case, a range of values for the stability constant C_{stab} is tested. All simulations were performed with $\tau_{max} = 0.3$, an initial timestep size of $1 \cdot 10^{-4}s$, and a grid consisting of 1000×10 voxels.

Coats Criterion								
C_{stab}	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5
Rel. Error NWP Mass in $[10^{-4}]$	1.18	3.38	32.9	362	1247	542	475	708
Total Iter. Nb.	5850	5354	4334	3333	3795	3182	3405	3317
Average Δt in $[s]$	0.43	0.47	0.58	0.75	0.66	0.79	0.73	0.75

Characteristic Wave Velocity Criterion								
C_{stab}	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5
Rel. Error NWP Mass in $[10^{-4}]$	0.99	0.75	1.90	3.27	4.72	5.99	4.32	37.1
Total Iter. Nb.	5419	5045	4748	4506	4306	4138	3997	3879
Average Δt in $[s]$	0.46	0.50	0.53	0.55	0.58	0.60	0.63	0.64

Generalized Characteristic Wave Velocity Criterion								
C_{stab}	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5
Rel. Error NWP Mass in $[10^{-4}]$	1.02	0.71	1.86	3.20	4.71	5.86	4.42	36.6
Total Iter. Nb.	5420	5046	4749	4507	4307	4140	3997	3879
Average Δt in $[s]$	0.46	0.50	0.53	0.55	0.58	0.60	0.63	0.64

fluid from entering or leaving the geometry. The gravity is neglected, and the fluid phases are assumed to be incompressible.






Figure 12: The geometry consists of two adjacent porous media, resulting in discontinuities in two-phase flow material parameters across the interface.

Table 9: This table summarizes the fluid and porous media parameters used in the experiments of Section 3.5. The subscripts 1 and 2 denote material parameters corresponding to material 1 and material 2, respectively. Both fluid phases are assumed to be incompressible. ϕ_d are the porosities and $K_{0,d}$ are the absolute permeabilities of the porous materials $d = 1, 2$. μ_w and μ_n are the viscosities of the wetting and the non-wetting phase, respectively.

ϕ_1	ϕ_2	$K_{0,1}$	$K_{0,2}$	μ_w	μ_n
0.42	0.5	$5.5 \cdot 10^{-11} m^2$	$5.8 \cdot 10^{-11} m^2$	$6.72 \cdot 10^{-2} Pa s$	$1.76 \cdot 10^{-5} Pa$

The parameters listed in **Table 9** are used. The non-wetting phase is air and the wetting phase corresponds to a light polymer resin. For porous material 1, the simplified Brooks-Corey relative permeability functions with $m_1^{w,BC} = m_1^{n,BC} = 4$ and a Van Genuchten capillary pressure function with $p_{e,1}^{VG} = 17.7 kPa$ and $m_1^{VG} = 0.74$ are used. For porous material 2, the simplified Brooks-Corey relative permeability functions with $m_2^{w,BC} = m_2^{n,BC} = 3$ and a Van Genuchten capillary pressure function with $p_{e,2}^{VG} = 12 kPa$ and $m_2^{VG} = 0.64$ are used. Initial saturations are set to 0.1 in material 1 and 0.9 in material 2. Both capillary pressure functions and initial states are shown in **Figure 13**.

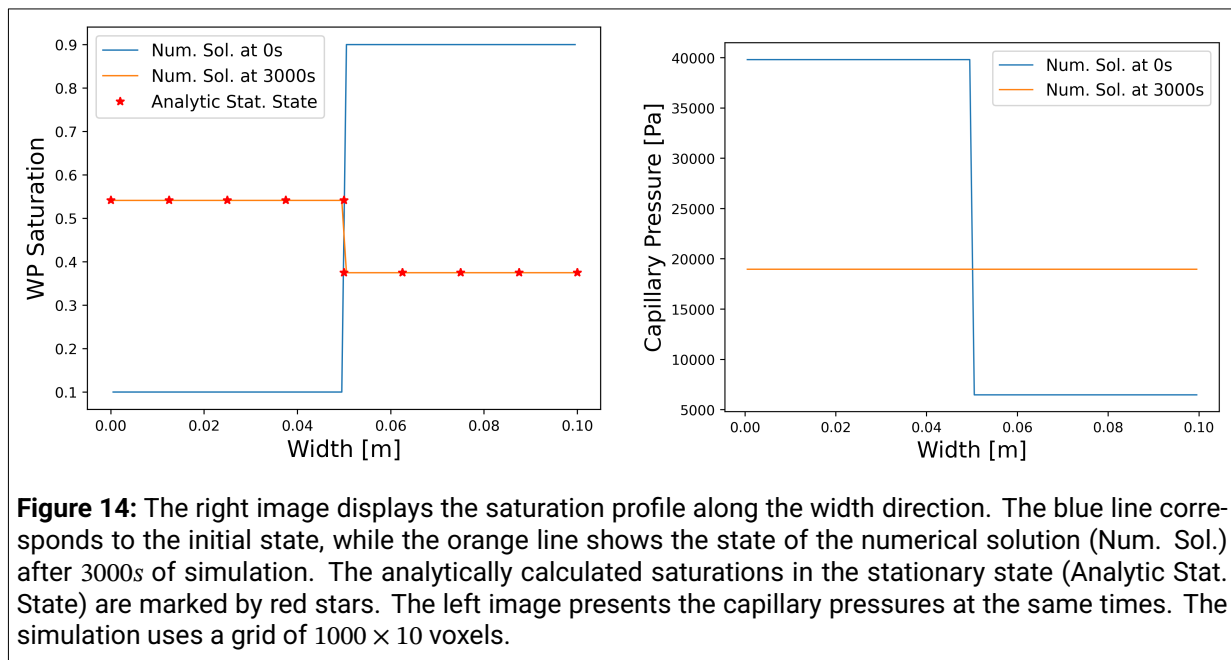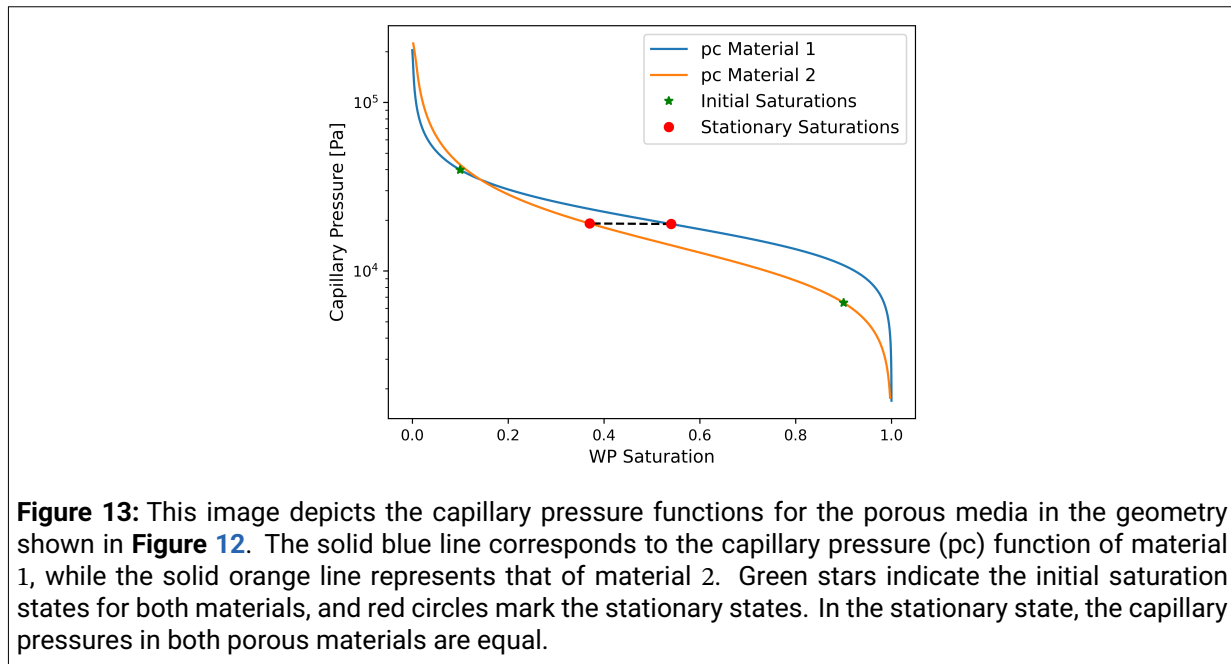

With this setup, the capillary pressure is initially discontinuous at the interface. Since there are no external influences on the flow, the capillary pressure becomes uniform across the interface in the stationary state. Because the two materials have different capillary pressure functions, equal capillary pressure at the interface results in a saturation jump. The stationary saturations $\hat{S}_{w,1}, \hat{S}_{w,2} \in [0, 1]$ in materials 1 and 2 are characterized by

$$p_{c,1}(\hat{S}_{w,1}) = p_{c,2}(\hat{S}_{w,2}) \quad (58)$$

$$\phi_1 \hat{S}_{w,1} + \phi_2 \hat{S}_{w,2} = \phi_1 \cdot 0.1 + \phi_2 \cdot 0.9 \quad (59)$$

Equation 58 ensures that the stationary state is reached, as the capillary pressure is homogeneous across the interface, while **Equation 59** enforces mass conservation. It requires the phase saturations to remain constant due to the wall boundary conditions and the incompressibility of the fluid phases. Solving the system of **Equation 58** and **Equation 59** yields stationary saturations of approximately $\hat{S}_{w,1} \approx 0.54$ and $\hat{S}_{w,2} \approx 0.37$. These values are shown in **Figure 13** together with the

capillary pressure functions of both porous materials. **Figure 14** displays the saturation and capillary pressure fields from the simulation after 3000s, showing strong agreement with the analytically determined stationary state.

This example illustrates that the solver effectively handles discontinuous material parameters.

4. SUMMARY AND CONCLUSIONS

A numerical method to simulate the two-phase Darcy equations was introduced. The method is an IMPES method with a finite volume discretization and a newly presented timestep criterion.

The solver can reliably simulate pressure drop and capillary dominated flows. This is validated using the Buckley-Leverett problem and an equalization problem of capillary pressure and gravity forces with a known stationary state. Moreover, the solver can simulate flows with compressible fluid phases and flows with discontinuous material parameters. Both are demonstrated using examples with known stationary states. As the solver decouples the pressure and saturation equations, the mass conservation of the non-wetting phase is critical. We showed that the error in the conservation of the non-wetting phase mass is low and it can be further reduced by using multiple IMPES iterations per timestep. The results indicate that increasing the number of IMPES iterations is effective up to five, and that odd numbers yield better accuracy than even numbers.

The new timestep criterion extends the one used by Lamine and Edwards (25) to include flows with capillary effects. The proposed timestep criterion uses numerical approximations of the derivatives of u and u_D with respect to the saturation to appropriately restrict the timestep in all flow scenarios. With this timestep criterion, all presented examples were efficiently and accurately simulated using $C_{stab} = 1$, regardless of what the dominant flow effects are. The comparisons with the Coats criterion showed that the presented timestep criterion achieves similar accuracy with fewer time iterations. Specifically, for the Buckley-Leverett example, the Coats criterion required about 19% more iterations, while for the capillary pressure gravity equalization example, it needed over three times as many. In both examples, comparisons of runtimes on the same hardware led to similar reductions to those observed in the required number of time iterations. This demonstrates that the generalized characteristic wave velocity criterion is not significantly more complex to compute than the Coats criterion.

In the case of compressible fluid phases, the new criterion produced significantly smaller errors in the non-wetting phase mass conservation compared to the Coats criterion. Overall, the proposed timestep criterion reliably limits the timestep sizes for the IMPES solver across various flow scenarios and proves to be more efficient than the Coats criterion in the tested examples.

Notation

ϕ	porosity
ρ_d	density of phase $d \in \{w, n\}$
S_d	saturation of phase $d \in \{w, n\}$
u_d	velocity of phase $d \in \{w, n\}$
p_d	pressure of phase $d \in \{w, n\}$
p_c	capillary pressure function
μ_d	viscosity of phase $d \in \{w, n\}$
k_{rd}	relative permeability of phase $d \in \{w, n\}$
K_0	absolute permeability
g	gravity
$M_d = \frac{k_{rd}}{\mu_d}$	mobility of phase $d \in \{w, n\}$

$M = M_w + M_n$	total mobility
R_d	gas constant of phase $d \in \{w, n\}$
ρ_d^{ref}, p_d^{ref}	reference density and pressure of phase $d \in \{w, n\}$
$u = u_w + u_n$	total velocity
$f_d = \frac{M_d}{M}$	fractional mobility of phase $d \in \{w, n\}$
u_D	velocity defined by Equation 13
$\gamma = \frac{M_w M_n}{M}$	coefficient function
$\tilde{S}_d$	effective saturation of phase $d \in \{w, n\}$
$S_{d,r}$	residual saturation of phase $d \in \{w, n\}$
p_c^{VG}	Van Genuchten capillary pressure function
p_e^{VG}, m^{VG}	parameters of Van Genuchten capillary pressure function
p_c^{BC}	Brooks-Corey capillary pressure function
p_e^{BC}, m^{BC}	parameters of Brooks-Corey capillary pressure function
k_{rd}^{BC}	Brooks-Corey relative permeability of phase $d \in \{w, n\}$
$m^{w,BC}, m^{n,BC}$	parameters of Brooks-Corey relative permeabilities
C_i	cell in the voxel grid
x_{C_i}	center of cell C_i
f_{ij}	shared face of cells C_i and C_j
n_{ij}	normal of face f_{ij}
$x_{f_{ij}}$	center of face f_{ij}
Δx_{ij}	distance of centers x_{C_i} and x_{C_j}
$n_D \in \{2, 3\}$	dimension of the voxel grid
$\Delta x_{i,d}$	size of cell C_i in dimension $d = 1, \dots, n_D$
$ C_i $	area ($n_D = 2$) or volume ($n_D = 3$) of cell C_i
e_d	canonical unit vector in dimension $d = 1, \dots, n_D$
$\mathbb{V}$	set of all cells of the voxel grid
F_{C_i}	set of all faces of C_i
$F_{C_i}^d$	set of all faces of C_i orthogonal to e_d
$ f_{ij} $	length ($n_D = 2$) or area ($n_D = 3$) of face f_{ij}
$\bar{\psi}^{H,f_{ij}}$	harmonic average of ψ at face f_{ij} , Eq. 18
$\bar{\psi}^{A,f_{ij}}$	arithmetic average of ψ at face f_{ij} , Eq. 19
m_I	number of IMPES iterations
ψ_i^k	variable ψ at cell C_i and timestep k
$\psi_{f_{ij}}^k$	variable ψ at face f_{ij} and timestep k
$F^{up,k_{l-1}}$	Eq. 23
$\tilde{k}_l$	Eq. 22
$f_{w,f_{ij}}^{up,k_{l-1}}$	Eq. 24
$\tilde{u}_{D,f_{ij}}^{k_{l-1}}$	Eq. 25
u_R	Eq. 27
$A_{f_{ij}}^{k_l}$	Eq. 29
$B_{f_{ij}}^{k_l}$	Eq. 30
$\hat{u}_{R,f_{ij}}^{k_l}$	Eq. 31
$\hat{u}_{D,f_{ij}}^{k_l}$	Eq. 32
C_{stab}	stability constant
ω_{ij}	characteristic wave velocity at face f_{ij}
$\omega_{ij}^{k,max}$	Eq. 48
I_{ij}^k	Eq. 49
Δt_k^{gcw}	timestep size of the generalized characteristic wave velocity criterion

$\tau_{\max}$	maximal relative increase of timestep size in one time iteration
$\Delta_s^{\min}$	minimal difference of saturations (spatial) in Eq. 47
$\Delta_t^{\min}$	minimal difference of saturations (temporal) in Eq. 47
$D_{fij}^{u,k-1}$	Approximation of Eq. 47
$D_{fij}^{u_D,k-1}$	Approximation of Eq. 47 but with u_D instead of u

STATEMENTS AND DECLARATIONS

Author Contributions

D. Burr: Conceptualization, Investigation, Methodology, Software, Validation, Visualization, Writing - original draft, Writing - Review & Editing. **S. Rief:** Conceptualization, Supervision, Writing - Review & Editing. **K. Steiner:** Conceptualization, Supervision, Writing - Review & Editing.

Conflicts of Interest

The authors have no relevant financial or non-financial interests to disclose.

Data, Code & Protocol Availability

The developed code of this work cannot be publicly shared as it is part of a commercial software product.

Funding Received

We acknowledge financial support from the High Performance Center Simulation and Software Based Innovation through a PhD scholarship. The authors also acknowledge the financial support provided by Leibniz Collaboration Excellence via the project Machine Learning for Simulation Intelligence in Composite Process Design. No additional funds, grants, or other support were received during the preparation of this manuscript.

ORCID IDs

Dominik Burr  <https://orcid.org/0000-0003-1351-4994>
 Stefan Rief  <https://orcid.org/0009-0001-1840-0235>
 Konrad Steiner  <https://orcid.org/0009-0005-8022-485X>

REFERENCES

1. Peter Bastian. *Numerical Computation of Multiphase Flows in Porous Media*. Habilitation thesis, Christian-Albrechts-Universität zu Kiel, Kiel, Germany, 1999.
2. Peter Bastian. A fully-coupled discontinuous galerkin method for two-phase flow in porous media with discontinuous capillary pressure. *Computational Geosciences*, 18:779–796, 2014. doi:10.1007/s10596-014-9426-y.
3. Michael J Best and Nilotpal Chakravarti. Active set algorithms for isotonic regression; a unifying framework. *Mathematical Programming*, 47(1):425–439, 1990. doi:10.1007/BF01580873.
4. Sergey Bochkhanov. minbleic subpackage of ALGLIB, 1999. URL: www.alglib.net/optimization/boundandlinearlyconstrained.php.
5. Konstantin Brenner, Clément Cancès, and Danielle Hilhorst. Finite volume approximation for an immiscible two-phase flow in porous media with discontinuous capillary pressure. *Computational Geosciences*, 17:573–597, 2013. doi:10.1007/s10596-013-9345-3.
6. Royal Harvard Brooks. *Hydraulic properties of porous media*. Colorado State University, 1965.
7. Se E Buckley and MCI Leverett. Mechanism of fluid displacement in sands. *Transactions of the AIME*, 146(01):107–116, 1942. doi:10.2118/942107-G.
8. Hui Cao. *Development of techniques for general purpose simulators*. Stanford University, 2002.

9. Huangxin Chen, Jisheng Kou, Shuyu Sun, and Tao Zhang. Fully mass-conservative IMPES schemes for incompressible two-phase flow in porous media. *Computer Methods in Applied Mechanics and Engineering*, 350:641–663, 2019. doi:10.1016/j.cma.2019.03.023.
10. Jie Chi, Mengfei Zhang, Zexin Su, Min Shuang, Zongxu Dong, Fengyun Cui, Deyu Jiang, Haoran Zhang, Minghan Jiang, and ZiYa Wang. Effect of gas compressibility during nitrogen immiscible flooding. *Physics of Fluids*, 37(1), 2025. doi:10.1063/5.0245731.
11. KH Coats. IMPES stability: selection of stable timesteps. *SPE Journal*, 8(02):181–187, 2003. doi:10.2118/84924-PA.
12. Arthur Thomas Corey. *Mechanics of immiscible fluids in porous media*. Water Resources Publication, 1994.
13. Stéphane Dellacherie. Checkerboard modes and wave equation. In *Proceedings of ALGORITMY*, volume 2009, pages 71–80, 2009.
14. N Djilali and PC Sui. Transport phenomena in fuel cells: from microscale to macroscale. *International Journal of Computational Fluid Dynamics*, 22(1-2):115–133, 2008. doi:10.1080/10618560701740017.
15. Mohamed F El-Amin. Iterative numerical scheme for non-isothermal two-phase flow in heterogeneous porous media. *Algorithms*, 12(6):117, 2019. doi:10.3390/a12060117.
16. Florian J Günter, Josef Keilhofer, Christof Rauch, Stefan Rössler, Michael Schulz, Wolfgang Braunwarth, Ralph Gilles, Rüdiger Daub, and Gunther Reinhart. Influence of pressure and temperature on the electrolyte filling of lithium-ion cells: Experiment, model and method. *Journal of power sources*, 517:230668, 2022. doi:10.1016/j.jpowsour.2021.230668.
17. Jan Hagemester, Florian J Günter, Thomas Rinner, Franziska Zhu, Alexander Papst, and Rüdiger Daub. Numerical models of the electrolyte filling process of lithium-ion batteries to accelerate and improve the process and cell design. *Batteries*, 8(10):159, 2022. doi:10.3390/batteries8100159.
18. Ola Härkegard. Efficient active set algorithms for solving constrained least squares problems in aircraft control allocation. In *Proceedings of the 41st IEEE Conference on Decision and Control, 2002.*, volume 2, pages 1295–1300. IEEE, 2002. doi:10.1109/CDC.2002.1184694.
19. Rainer Helmig and Ralf Huber. Comparison of galerkin-type discretization techniques for two-phase flow in heterogeneous porous media. *Advances in Water Resources*, 21(8):697–711, 1998. doi:10.1016/S0309-1708(97)00023-7.
20. Pierre Horgue, Cyprien Soulaire, Jacques Franc, Romain Guibert, and Gérald Debenest. An open-source toolbox for multiphase flow in porous media. *Computer Physics Communications*, 187:217–226, 2015. doi:10.1016/j.cpc.2014.10.005.
21. Patrick Jenny, Seong H Lee, and Hamdi A Tchelepi. Adaptive fully implicit multi-scale finite-volume method for multi-phase flow and transport in heterogeneous porous media. *Journal of Computational Physics*, 217(2):627–641, 2006. doi:10.1016/j.jcp.2006.01.028.
22. Jiamin Jiang and Jie Yang. Coupled fluid flow and geomechanics modeling of stress-sensitive production behavior in fractured shale gas reservoirs. *International Journal of Rock Mechanics and Mining Sciences*, 101:1–12, 2018. doi:10.1016/j.ijrmms.2017.11.003.
23. Jiamin Jiang and Rami M Younis. An efficient fully-implicit multislope muscl method for multiphase flow with gravity in discrete fractured media. *Advances in Water Resources*, 104:210–222, 2017. doi:10.1016/j.advwatres.2017.04.009.
24. A Krechel and K Stüben. Operator dependent interpolation in algebraic multigrid. In *Multigrid Methods V: Proceedings of the Fifth European Multigrid Conference held in Stuttgart, Germany, October 1–4, 1996*, pages 189–211. Springer, 1998. doi:10.1007/978-3-642-58734-4_11.
25. Sadok Lamine and Michael G Edwards. Multidimensional upwind schemes and higher resolution methods for three-component two-phase systems including gravity driven flow in porous media on unstructured grids. *Computer Methods in Applied Mechanics and Engineering*, 292:171–194, 2015. doi:10.1016/j.cma.2014.12.022.
26. Alexander Laugier and József Garai. Derivation of the ideal gas law. *Journal of Chemical Education*, 84(11):1832, 2007. doi:10.1021/ed084p1832.
27. SH Lee, C Wolfsteiner, and HA Tchelepi. Multiscale finite-volume formulation for multiphase flow in porous media: black oil formulation of compressible, three-phase flow with gravity. *Computational Geosciences*, 12:351–366, 2008. doi:10.1007/s10596-007-9069-3.
28. Bo Lu and Mary F Wheeler. Iterative coupling reservoir simulation on high performance computers. *Petroleum Science*, 6:43–50, 2009. doi:10.1007/s12182-009-0008-x.
29. Tianran Ma, Keni Zhang, Weijun Shen, Chaobin Guo, and Hao Xu. Discontinuous and continuous galerkin methods for compressible single-phase and two-phase flow in fractured porous media. *Advances in Water Resources*, 156:104039, 2021. doi:10.1016/j.advwatres.2021.104039.

30. Rafael March, Florian Doster, and Sebastian Geiger. Assessment of co₂ storage potential in naturally fractured reservoirs with dual-porosity models. *Water Resources Research*, 54(3):1650–1668, 2018. doi:10.1002/2017WR022159.
31. Véronique Michaud. A review of non-saturated resin flow in liquid composite moulding processes. *Transport in Porous Media*, 115(3):581–601, 2016. doi:10.1007/s11242-016-0629-7.
32. Florice Nzikou Mouketou and Andrei Kolesnikov. Modelling and simulation of multiphase flow applicable to processes in oil and gas industry. *Chemical Product and Process Modeling*, 14(1):20170066, 2019. doi:10.1515/cppm-2017-0066.
33. Carlos A de Moura and Carlos S Kubrusly. *The Courant-Friedrichs-Lewy (CFL) condition: 80 years after its discovery*. Birkhäuser Basel, 2012.
34. Tom Myers. Potential contaminant pathways from hydraulically fractured shale to aquifers. *Groundwater*, 50(6):872–882, 2012. doi:10.1111/j.1745-6584.2012.00933.x.
35. George SH Pau, Ann S Almgren, John B Bell, and Michael J Lijewski. A parallel second-order adaptive mesh algorithm for incompressible flow in porous media. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 367(1907):4633–4654, 2009.
36. George Shu Heng Pau, John B Bell, Ann S Almgren, Kirsten M Fagnan, and Michael J Lijewski. An adaptive mesh refinement algorithm for compressible two-phase flow in porous media. *Computational Geosciences*, 16:577–592, 2012. doi:10.1007/s10596-011-9270-2.
37. Carlos Redondo, Gonzalo Rubio, and Eusebio Valero. On the efficiency of the IMPES method for two phase flow problems in porous media. *Journal of Petroleum Science and Engineering*, 164:427–436, 2018. doi:10.1016/j.petrol.2018.01.066.
38. Feng Ren, Guowei Ma, Yang Wang, Lifeng Fan, and Hehua Zhu. Two-phase flow pipe network method for simulation of co₂ sequestration in fractured saline aquifers. *International Journal of Rock Mechanics and Mining Sciences*, 98:39–53, 2017. doi:10.1016/j.ijrmms.2017.07.010.
39. Chae M Rhie and Wei-Liang Chow. Numerical study of the turbulent flow past an airfoil with trailing edge separation. *AIAA Journal*, 21(11):1525–1532, 1983. doi:10.2514/3.8284.
40. Theresa Schollenberger, Christian Rohde, and Rainer Helmig. Two-phase pore-network model for evaporation-driven salt precipitation–representation and analysis of pore-scale processes. *arXiv preprint arXiv:2503.22533*, 2025. doi:10.48550/arXiv.2503.22533.
41. Pengtao Sun, Guangri Xue, Chaoyang Wang, and Jinchao Xu. Fast numerical simulation of two-phase transport model in the cathode of a polymer electrolyte fuel cell. *Communications in computational physics*, 6(1):49, 2009. doi:10.4208/cicp.2009.v6.p49.
42. M Th Van Genuchten. A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil science society of America journal*, 44(5):892–898, 1980. doi:10.2136/sssaj1980.03615995004400050002x.
43. Chunyang Zhao, Bo Yang, Shilong Wang, Chi Ma, Sibao Wang, and Fengyang Bi. Three-dimensional numerical simulation of meso-scale-void formation during the mold-filling process of lcm. *Applied Composite Materials*, 26:1121–1137, 2019. doi:10.1007/s10443-019-09770-w.