InterPore JOURNAL

Invited Commentary

# THE IMPORTANCE AND CHALLENGES ASSOCIATED WITH MULTI-SCALE HETEROGENEITY FOR GEOLOGICAL STORAGE

Catherine Spurin[a], Catherine Callas[a], Nihal Darraj[b], Maja Rücker[c], Sally Benson[a]

*[a]Department of Energy Science & Engineering, Stanford University, Stanford, CA, USA; [b]Department of Earth Science & Engineering, Imperial College London, London, UK; [c]Department of Mechanical Engineering, Eindhoven University of Technology, Eindhoven, Netherlands*

**Correspondence to:**
Catherine Spurin,
cspurin@stanford.edu

**How to Cite:**
Spurin, C., Callas, C., Darraj, N., Ruecker, M., & Benson, S. (2025). The Importance and Challenges Associated with Multi-scale Heterogeneity for Geological Storage. *InterPore Journal*, 2(1), IPJ260225–2. https://doi.org/10.69631/ipj.v2i1nr76

**RECEIVED:** 12 Feb. 2025
**ACCEPTED**: 17 Feb. 2025
**PUBLISHED**: 26 Feb. 2025

@2025 The Authors

## ABSTRACT

Understanding multi-scale heterogeneity in porous media has become increasingly critical as the world transitions from fossil fuel production to geological storage of $CO_2$ and $H_2$ for climate change mitigation. This commentary examines why small-scale heterogeneities have taken on a heightened importance in modeling subsurface fluid migration. We identify three key factors: increased public scrutiny and stricter permitting requirements for storage projects, different risk tolerances requiring long-term monitoring, and distinct flow physics compared to traditional oil and gas extraction. Drawing from current research, we demonstrate how current models consistently underestimate $CO_2$ plume spread, likely due to inadequate representation of small-scale heterogeneities, which will also heavily impact $H_2$ storage in porous rocks. We review the current state of research on incorporating small-scale heterogeneities into field scale models, discuss relevant spatial scales for both $CO_2$ and $H_2$ storage applications, and highlight promising directions for future research in this critical area.

## KEYWORDS

Multicomponent multiphase fluid, $CO_2$ sequestration, Hydrogen storage, Underground hydrogen storage, CCUS, Carbon capture utilization and storage

This is an open access article published by InterPore under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License (CC BY-NC-ND 4.0) (https://creativecommons.org/licenses/by-nc-nd/4.0/).

## 1. INTRODUCTION

### 1.1. Why research on multi-scale heterogeneity is more important now than ever

The movement of multiple fluids through complex porous media is ubiquitous in nature and beyond. Historically, flow in geologic media focused on oil and gas production. However, more recent research has shifted towards the geologic storage of $CO_2$ and $H_2$ as a greenhouse gas mitigation technique (7). There is now an increased importance placed on accounting for small-scale heterogeneities in large-

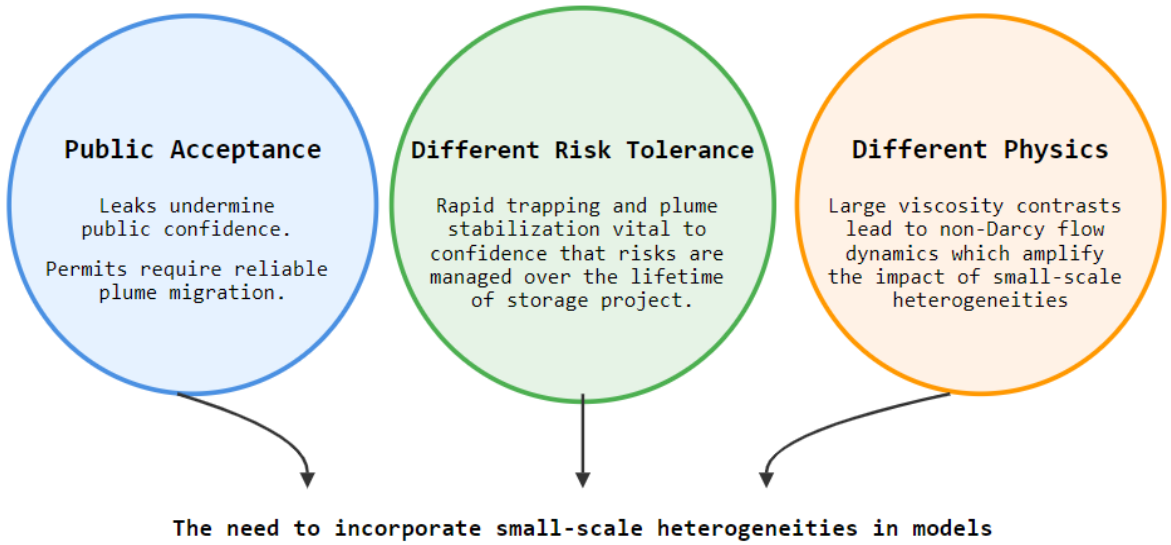



**Figure 1:** Overview to why small-scale heterogeneities have increased importance in geologic storage applications.

scale reservoir models; this is highlighted in **Figure 1**. The first significant difference between geological storage projects and historical oil and gas production is a social concern about retention. Accurate modeling of small-scale heterogeneities and the impact on a project's plume migration and pressure buildup is integral to developing safe storage projects. Secondly, the risk tolerance for geological storage differs from that of oil and gas production. While the latter is driven by market demand and commodity prices, the former is often incentivized by policy frameworks aimed at reducing greenhouse gas emissions. This introduces additional layers of complexity as storage projects must navigate regulatory requirements, public perception, and long-term liability concerns. Permits for $CO_2$ storage projects require monitoring of the plume until stabilization has occurred (31, 92). The extended timelines and costs associated with monitoring and verification further underscore the need for robust, predictive models that can inform decision-making and policy development. For $H_2$ storage projects, the $H_2$ is extracted as and when required, this means that the plume must be well contained, with little trapping. Lastly, different physics and flow dynamics are at play in storage projects. Instead of extracting a viscous non-wetting phase, such as in conventional oil extraction, geologic storage involves injecting a low-viscosity non-wetting phase. Flow rates for both phases are sufficiently low for flow to be within the capillary-dominated regime (53).

In many previous geological $CO_2$ storage projects, modeling predictions have differed greatly from what occurs during injection by underestimating the spread of $CO_2$ in the subsurface. History matching has been performed for these projects; however, matches are only achieved using model parameters outside the range of observations at wells. For example, this scenario occurred at the Sleipner project in Norway (16, 88), In Salah in Algeria (60, 67), and the Frio and IBDP projects in the United States (12, 21, 30, 33, 37, 76). Small-scale heterogeneities have been shown to control flow and could explain why accurately predicting the $CO_2$ plume migration in the subsurface has been so challenging (33, 80). This includes the presence of permeable fractures that are below seismic imaging resolution (12). While the aforementioned examples are for $CO_2$ storage, the same risk on migration and trapping exists for $H_2$ storage. In both storage scenarios, a small plume is desirable. However, in the case of $H_2$ storage, trapping is undesirable. Thus, for the geological storage of $CO_2$ and $H_2$, one of the most significant challenges to successfully predicting the subsurface migration and trapping (or lack of) of fluids is incorporating or accounting for small-scale heterogeneities in field-scale models.

## 1.2. The challenge

While the need to account for small-scale heterogeneities at the field scale has been identified, there are still outstanding questions on how to incorporate experimental observations of the impact of small-scale

heterogeneities in field-scale models, so that accurate predictions of plume migration and trapping can be made. The effect of small-scale heterogeneities depends on the type and degree of the heterogeneity. Researchers have observed a wide range of different impacts across a range of spatial scales. How to generalize these observations and upscale them for inclusion in field scale models is non-trivial.

In this work, we present an overview of the wide range of heterogeneity observed by researchers and discuss its impact on flow and trapping. We highlight the importance of modeling these small-scale heterogeneities to predict plume migration and trapping efficiency successfully. We discuss different methods for accounting for these small-scale heterogeneities without modeling them directly at the field scale. We provide commentary on the current state of research and the scales of interest for $CO_2$ and $H_2$ storage and showcase interesting avenues for future research.

## 2. SCALES OF HETEROGENEITY

The influence of heterogeneity on fluid flow needs to be accounted for at the field scale to accurately predict the migration and trapping of fluids in the subsurface. Historically, samples on the order of centimeters were cored, and measurements from these experiments were applied in reservoir simulations (77). These experiments are referred to as core-scale experiments. However, in more recent years, improvements in X-ray tomography has led to research on smaller scales, resolving dynamics down to the scale of individual pores (the pore-scale) (13). The imaging of fluids in situ for pore-scale and core-scale experiments is typically done using X-ray tomography. Due to X-ray attenuation, image resolution is proportional to image size (18, 87). This means that high resolution images require smaller samples. Thus, for pore-scale observations, samples are in the range of $< 10$ mm in both length and diameter, and flow is observed to be dominated by heterogeneity on the order of millimeters. For core-scale observations, heterogeneities on the order of centimeters appear to dominate flow and at the field scale, bedding planes on the orders of meters heavily influence flow. This wide range of scales is illustrated with examples in **Figure 2**.

While larger scale heterogeneity influences fluid flow at the field scale, small-scale heterogeneity also plays a role in plume migration and trapping at this scale. The incorporation of small-scale permeability heterogeneity in field scale models was linked to faster plume migration (33). This suggests that the lack of representation of these small-scale heterogeneities in field scale models could be the reason why, historically, $CO_2$ plume migration has been poorly predicted (and often underestimated). Small-scale heterogeneity also influences residual trapping (33, 36). Thus, it will influence plume stabilization times and storage security (40).

Incorporating small-scale heterogeneities at the field scale is non-trivial. A typical pore-scale experimental resolution is 4 µm (73). With this resolution, we would need $\approx 10^{16}$ grid cells per cubic meter.

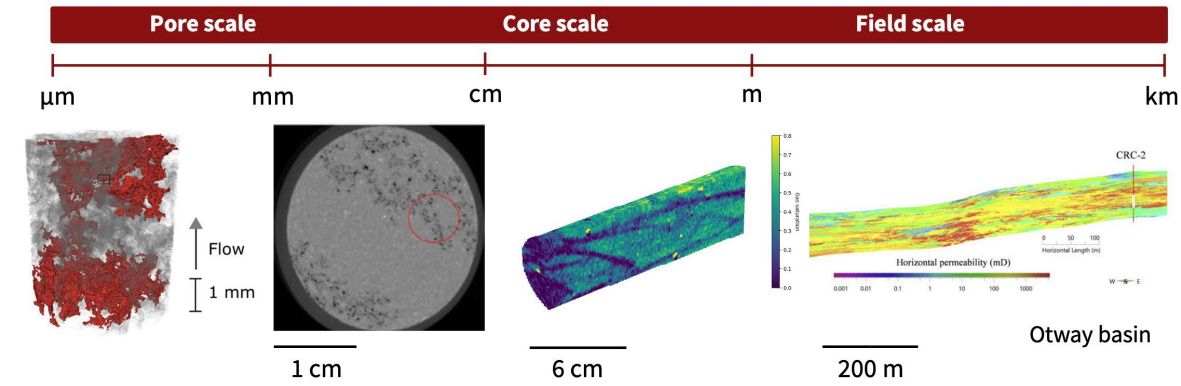



**Figure 2:** The manifestation of heterogeneity across different spatial scales, from the order of millimeters in pore-scale experiments, to hundreds of meters at the field scale. Pore-scale images taken from Spurin et al (72, 74), core-scale image of a core from the Otway basin, with permeability from the Otway basin cross section taken from Mishra et al (52).

In comparison, current field scale simulations have ≈$10^6$ grid cells to capture an area on the order of hundreds to thousands of cubic meters (65). Thus, from a computational point of view, modeling pore-scale dynamics even at the meter scale is infeasible (9). However, even if computational resources did not limit the modeling of pore-scale dynamics, we are unable to resolve the subsurface pore space at the field scale. This is because imaging of the subsurface in the field is done using seismic surveys. These surveys have a resolution of around 50 m (12). While improvements are being made to seismic imaging capabilities, the resolution is linked to sensor spacing. This means that a resolution on the order of millimeters is infeasible due to the size of sensors, and how many sensors this would require. There is research that tries to capture the impact of small-scale heterogeneities at the field scale without modeling the impacts directly. This includes flow rate dependency in relative permeability curves (10) and composite relative permeability curves (52).

### 2.1. Sub-pore scale heterogeneity

This commentary explores flow physics from the pore-scale up. Both $CO_2$ and $H_2$ typically act as the non-wetting phase in storage scenarios, meaning they minimize contact with the rock surface, while the water or brine occupies the smaller regions of the pore space (2, 23, 78). However, sub-pore processes may influence larger scale fluid dynamics. Firstly, wetting, which results from molecular forces acting within and between fluids and a solid surface, is influenced by the chemical and structural heterogeneity of the solid surface. Coverage of grains for instance, by clay, cement or other contaminants, but also roughness, may cause local variation which can change macroscopic responses (62, 94). Furthermore, if the $CO_2$ or $H_2$ occupies narrow regions of the pore space, molecular interactions may be significant (90).

In many cases, these small-scale effects may be neglected, however, researchers have observed situations where this is not the case, and these small-scale effects have altered the larger scale responses in regards to flow or structural integrity (63, 64). These effects may be more significant for $H_2$ storage, due to its small molecular size (38). $H_2$ has the ability to reach smaller pores, raising questions on differences in regards to adsorption or structural alteration of the clay. Investigations of different minerals have shown that the small molecular size would allow for hydrogen to penetrate for instance clay (91). Moreover, hydrogen can trigger microbial activity (20, 79) which further triggers questions on combined processes within a single pore.

Most studies indicate the contribution of sub-pore fluid dynamics to the overall saturation change is small (24, 89). These studies, however, were limited to model systems, not accounting for variability in rock and the time scales involved. How heterogeneities at this length scale impact larger scale responses is still subject to investigation, so our focus in this commentary remains on the pore-scale and larger dynamics. However, we acknowledge the potential significance of sub-pore processes, particularly for $H_2$ storage.

## 3. THE OBSERVED IMPACT OF SMALL-SCALE HETEROGENEITY

A wide range of heterogeneities have been observed in experiments conducted across all spatial scales. Here, we highlight the range and potential impact for different classifications of small-scale heterogeneity observed by researchers. We focus on capillary barriers, highly channelized flow, flow rate dependency in the capillary dominated regime, the influence of the orientation of heterogeneity with respect to flow direction, and how pore space heterogeneity may evolve with time. This section is by no means exhaustive, but it shows the wide range of impact small-scale heterogeneities have on larger scale flow properties such as trapping, and hopefully highlights to the reader that there is no ‘silver bullet’ or single adaptation that could address the influence of all types of small-scale heterogeneity at the field scale. We highlight the need for further research, and for careful consideration of if experiments are translatable to the field scale depending on experimental methodology and/or sample size.

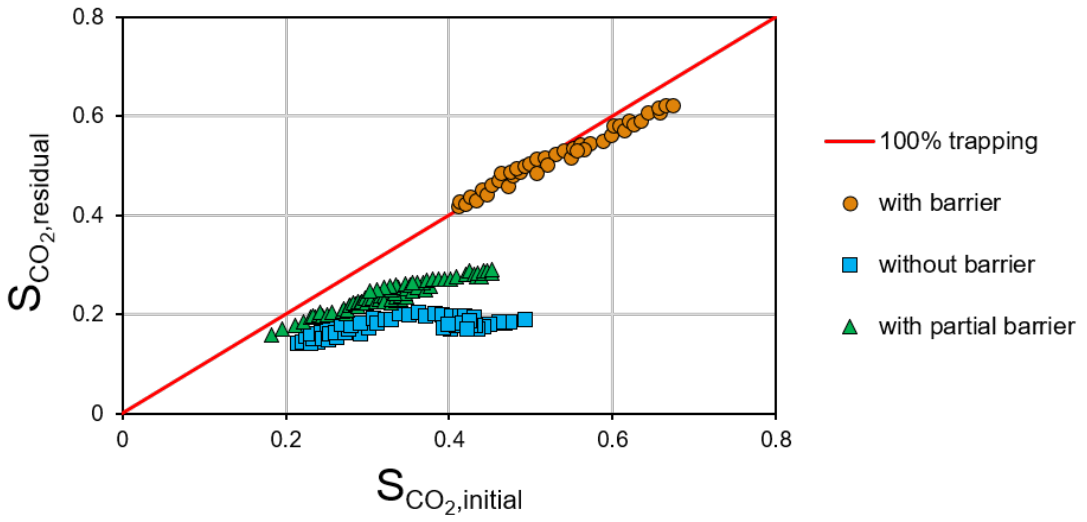



**Figure 3:** The impact of a capillary barrier on trapping efficiency. Points with a complete capillary barrier (with barrier) and without barrier are from Krevor et al (42), points for a partial capillary barrier are from Oh et al (54)

## 3.1. Capillary barriers

Capillary barriers are regions of low porosity or permeability, that inhibit the movement of the non-wetting phase (the $CO_2$ or $H_2$). At the core-scale, experiments by S. C. Krevor et al (41) explored a core with a complete capillary barrier at the end of the core. Behind this barrier, $CO_2$ was able to build up, improving trapping (shown in **Fig. 3**). The barrier was removed, and the experiment was repeated. Without the barrier, the trapping significantly decreased, suggesting that the presence of a capillary barrier improves trapping in the subsurface.

However, other experiments with a less extreme capillary barrier (denoted as a partial capillary barrier in **Fig. 3**) have an intermediate trapping efficiency to the results by S. C. Krevor et al (41) and Oh et al (54). In the subsurface, a complete capillary barrier is unlikely, as the $CO_2$ or $H_2$ can move laterally, in a way that is restricted in core- and pore-scale experiments. Thus, upscaling the observations with a complete capillary barrier, or no capillary barrier at all, will likely misrepresent the trapping in the subsurface.

Overall, the presence of a capillary barrier heavily influences the trapping efficiency. **Figure 3** highlights a wide range of trapping efficiencies, which introduces uncertainty in predicted field scale values. Small-scale heterogeneities improve the trapping efficiency and so could be desirable for geologic $CO_2$ storage (and undesirable for $H_2$ storage). However, the impact of these capillary barriers in small samples might not be representative of what will happen at the larger scale where there are more options for the $CO_2$ and $H_2$ to move in space.

## 3.2. Highly Channelized flow

Highly channelized flow arises when the non-wetting phase (the $CO_2$ or $H_2$) travels in a restricted region of the rock sample. The non-wetting phase saturation is high in these locations, but the overall non-wetting phase saturation is low. These highly channelized flows lead to rapid migration due to small pore volume utilization. Furthermore, with few possible pathways through the sample, and low connectivity, intermittent flow pathways could be expected (70). This leads to a time dependent relative permeability and dynamics not currently incorporated in field scale models.

Highly channelized flow has been observed to significantly impact trapping efficiency. In $H_2$ experiments conducted by Boon and Hajibeygi (10), the $H_2$ saturation at the end of drainage was high, but during

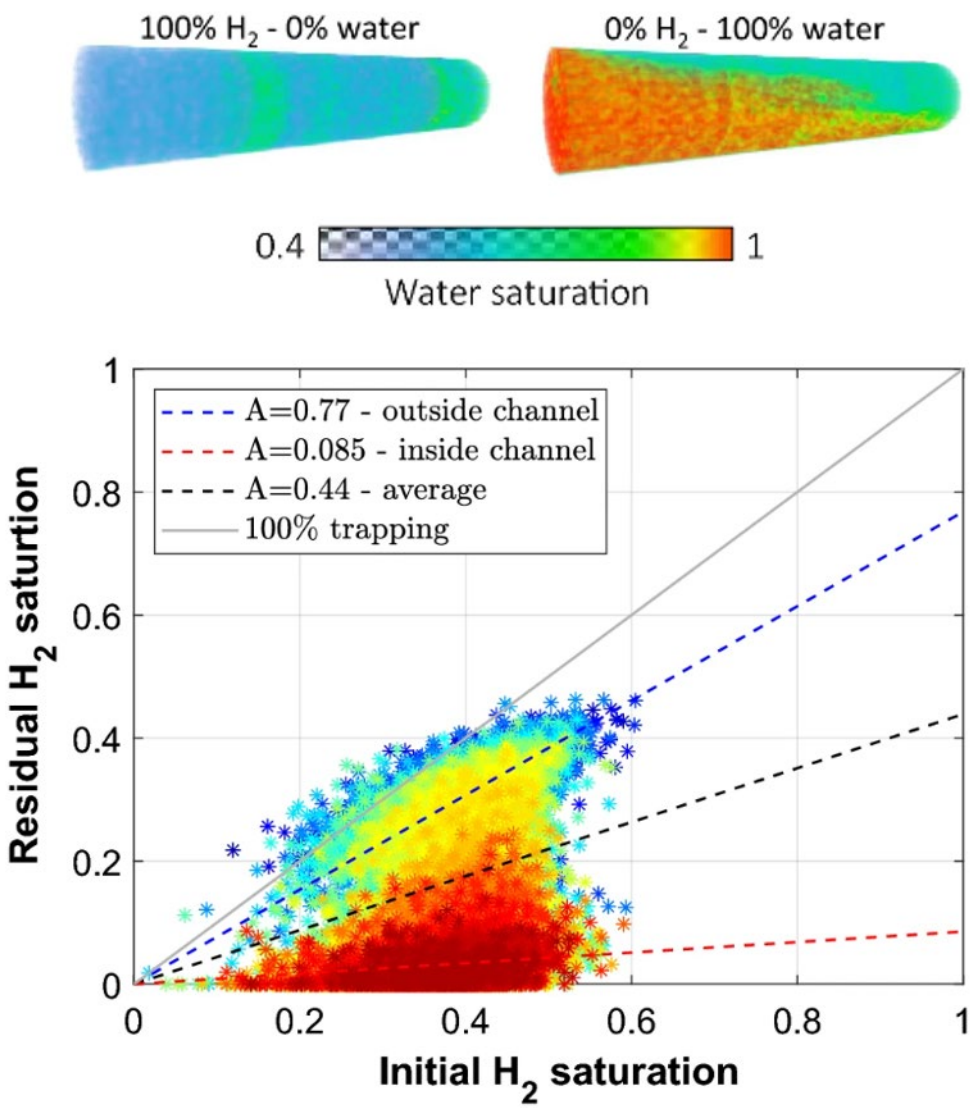



**Figure 4:** The impact highly channelized flow on trapping efficiency in $H_2$ experiments conducted by Boon and Hajibeygi (10). The water saturation across the core at the end of drainage and imbibition are shown at the top. For the trapping curve, color corresponds to vertical location in the core. Blue is the top of the core and red is the bottom of the core. The dashed lines denote the best-fit linear trapping relationships. The grey line denotes 100% trapping.

imbibition, the water formed fingers that evolved into channels. Outside the channel, the trapping of the $H_2$ was high, while trapping in the location of the fingers was close to zero (as shown in **Fig. 4**). This led to trapping efficiencies between 0 and 100% depending on location in the rock sample. More complex patterns of heterogeneity (i.e. beyond layers) have also been observed, with some highlighted in **Figure 5**. Some of these patterns arise from features such as compaction bands or cross-bedding (**Fig. 5b**) (61). In other work, the porosity was homogeneous, but the saturation distribution was highly heterogeneous (the Bentheimer sandstone in **Fig. 5c**) (66). This makes it difficult to predict fluid distributions prior to the experiment and inhibits our ability to make predictions based off porosity.

Analytical models have been created to incorporate the impact of highly channelized flow (11, 85). While these models are able to successfully capture the impact of high permeability layers (such as those in **Fig. 5a**), other experiments cannot be replicated even with history matching (47, 86). This is likely due to heterogeneity below the resolution of the images.

Overall, highly channelized flow leads to low non-wetting phase saturations in experiments. This introduces large uncertainty in relative permeability values for higher non-wetting phase saturations,

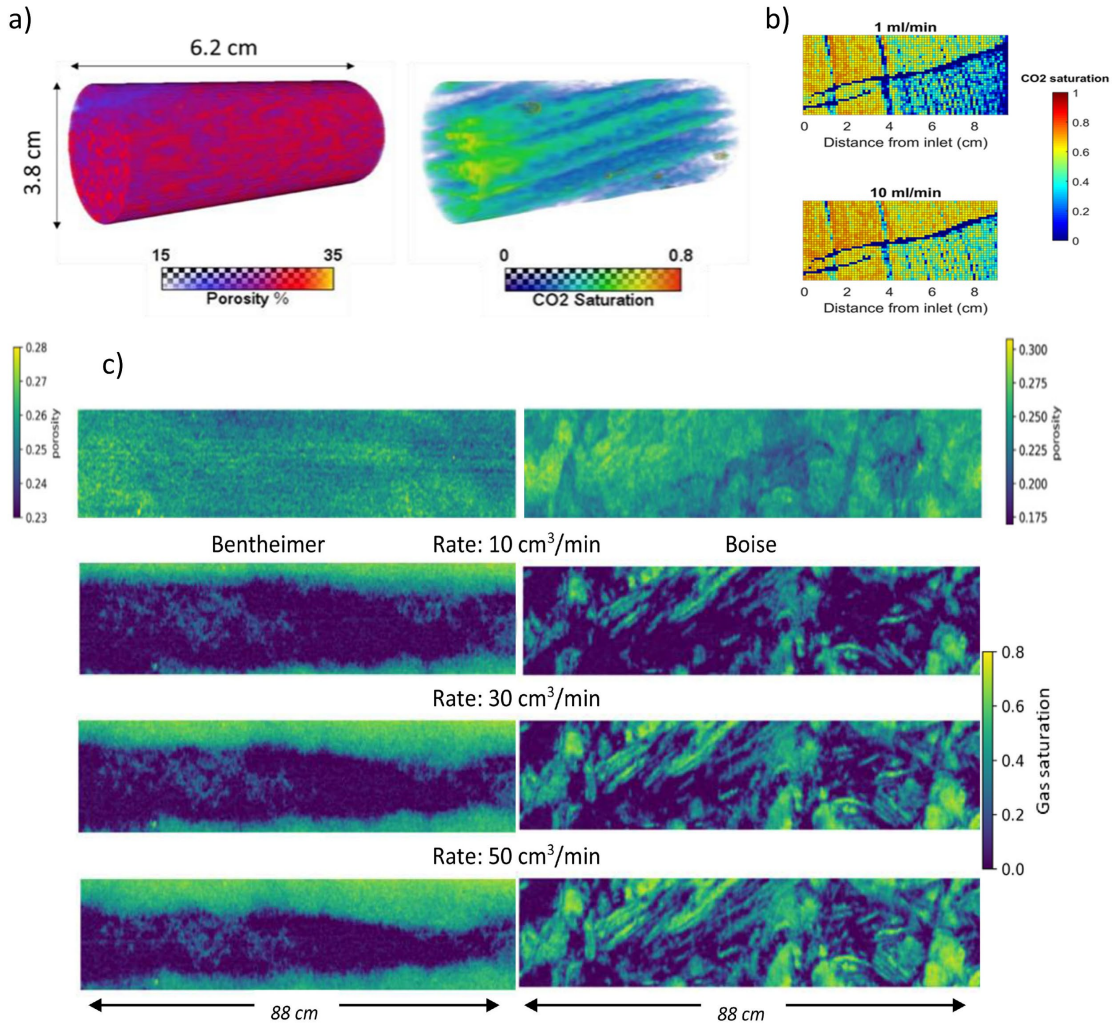



**Figure 5:** The impact of highly channelized flow on fluid distribution **a)** high permeability layers causing channeling of $CO_2$ (11), **b)** compaction bands causing channeling of $CO_2$ (61), and **c)** channeling of the non-wetting phase for a relatively homogeneous Bentheimer sandstone compared to a heterogeneous Boise sandstone (66).

which might be present in the plume at the field scale due to upwards migration of the non-wetting phase. Highly channelized flow also leads to reduced water relative permeabilities. This impact could be represented at the field scale.

## 3.3. Flow rate dependency in capillary dominated regime

Another observation is the influence of flow rate on residual trapping. While a difference is expected between the capillary dominated regime and the viscous dominated regime (7, 11), researchers have seen large changes in the relative permeability and trapping even in: **1)** the capillary dominated regime, and **2)** with very small changes in flow rate.

In experiments by Manoorkar et al (47), the capillary number was varied between $10^{-5}$ and $10^{-6}$ (so purely in the capillary dominated regime, with the flow rate increased by a factor of 10), but the trapping efficiency was significantly less for the higher flow rate experiment. Furthermore, the Land trapping model only fitted the trapping data for the lower flow rate experiments. This was attributed to the impact of millimeter and centimeter scale heterogeneity in the samples. This dependency on flow rate in the capillary regime was also observed in variable flow rate experiments (74). Here, the same flow rates were used, but the injection sequence was either high flow to low flow, or vice versa. The order of injection rate influenced the amount of trapping observed at the end of the experiment.

Analytical frameworks have been derived to capture this. They highlight that incredibly low capillary numbers are necessary for flow dynamics to stabilize (44, 45, 55). However, field scale simulations typically only have a viscous dominated relative permeability curve to simulate flow near the injection well, and a capillary dominated relative permeability curve to simulation flow away from the injection well. These simulations are not influenced by the injection sequence, just total flow rates and duration of injection. Thus, the flow rate dependency in the capillary dominated regime is not currently captured at the field scale.

### 3.4. Orientation of heterogeneity with respect to flow direction

The orientation of heterogeneity has also been observed to influence flow and trapping. In this section we cover two topics: **1)** the orientation of heterogeneity relative to flow direction is an important consideration when conducting or upscaling experiments, and **2)** that the influence of heterogeneity varies in the direction of flow relative to upwards migration (assumed to be perpendicular to the flow direction).

Firstly, the orientation of heterogeneity influences trapping efficiency in core-scale experiments (58). Numerical models exist that allow researchers to reorientate the heterogeneity and assess the impact of this on larger scale flow properties such as trapping and relative permeability (32). Despite the recognized importance of the orientation of heterogeneity, the orientation of cores is often not documented once a core is drilled, leading to uncertainty when upscaling predictions. If there are dipping beds, the core should be drilled in the direction of the beds, rather than horizontally. The presence of thin mudstone, siltstone, shale or other low permeability layers will significantly influence the vertical relative permeability while having little impact on the horizontal relative permeability.

At the field scale, the treatment of anisotropic relative permeabilities remains inconsistent. Some studies do not incorporate anisotropic relative permeabilities (25). Others incorporate anisotropic relative permeability by reducing the vertical component by a given factor (3). Some studies explicitly account for directional variations in relative permeability with distinct relative permeability curves (1). This lack of methodological consensus introduces additional uncertainty in upscaling reservoir characterization and predictive modeling, highlighting the need for more robust and systematic approaches to representing anisotropic flow behaviors in heterogeneous geological systems.

### 3.5. Dynamic changes in pore space heterogeneity

Pore space heterogeneity can evolve with time due to phase changes such as dissolution and precipitation. The morphology of a dissolution front exhibits significant variability, ranging from uniform to the formation of distinct wormholes and channels. This variability is governed by the interplay between mixing rates, dissolution kinetics, and the inherent heterogeneity of the pore space (69). This creates a feedback loop where small-scale heterogeneities influence dissolution patterns, which in turn modify the pore-scale architecture. When wormholes or channels develop, they can dramatically alter flow patterns, leading to preferential flow paths (57). These dissolution-induced modifications to pore structure have significant implications for both $CO_2$ and $H_2$ subsurface storage applications (35). While mineral precipitation primarily affects $CO_2$ storage scenarios (17), both $CO_2$ and $H_2$ storage in saline aquifers face challenges related to salt precipitation (27). These precipitation processes, like dissolution, are influenced by existing heterogeneities while simultaneously modifying the pore structure (46, 57).

This dynamic evolution of pore space heterogeneity through phase changes introduces additional complexity to modeling efforts. The temporal variation of heterogeneity, coupled with its role in driving further changes, creates a complex feedback system that must be carefully considered in pore-scale modeling approaches.

## 4. DIFFERENCES IN DYNAMICS ACROSS SCALES

Experiments conducted at the pore-scale, with experimental parameters such as capillary number and viscosity ratio matched to core-scale experiments, have highlighted some differences in dynamics across

scales. It is important to quantify these differences in order to predict how they might manifest at the field scale.

Pore-scale experiments have shown a fluid flow phenomena termed intermittent pathway flow that heavily influences energy dissipation and trapping (59). The amount of fluid fluctuating was observed to increase with increasing capillary number (71, 93). However, while experiments conducted in larger samples observed this trend at very low capillary numbers. There was a decrease in the amount of intermittent pathway flow observed at higher capillary numbers, that was attributed to the increased importance of viscous forces (even with very low capillary numbers $\ll 1$, at around $10^{-7}$) (83). A single critical flow pathway has been observed in pore-scale observations (see **Fig. 6**). However, more pathways are possible in larger cores, which controls the amount of dynamics, but also the impact of the dynamics on the relative permeability.

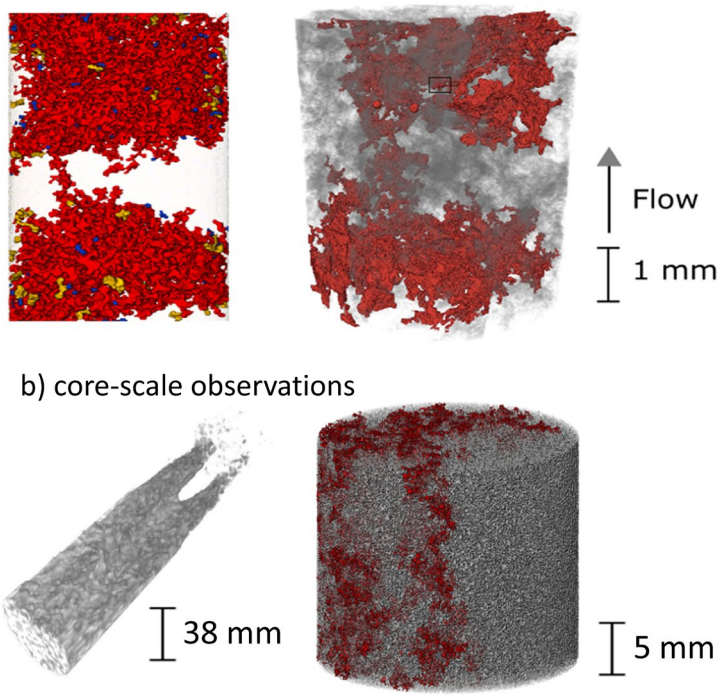



**Figure 6: a)** pore-scale observations highlighting a single pore controlling flow across the sample, for $H_2$ on the left (36), and $N_2$ on the right (72), and **b)** core-scale observations highlights multiple channels for the flow to move, for $H_2$ of the left (10), and $N_2$ on the right (83) The experiment in the bottom right image matches the experimental conditions of the top right image. Few core-scale $H_2$ experiments have been conducted, with no known replication of the top left experiment.

In other work, two samples from the typical range of core-scale experiments were explored (74). The role of a variable injection rate was explored in both samples, and the observed impact was different for the different sized samples. This was attributed to the presence of a connected flow pathway across the core for the smaller sample. This creates something that might not be present in the subsurface (a pathway for the instantaneous transmission of pressure across the core). Other work explored the pressure signal of intermittent pathways versus connected pathway flow in small samples, where fluid interfaces could be resolved. When the experiments were repeated in larger samples (with the flow rate changed to match capillary numbers), the signal for connected pathway flow was not observed (75). This highlights that a connected pathway is unlikely at larger spatial scales, and experiments with a connected flow pathway across the core might not present representative dynamics. The relaxation of fluids post trapping is also influenced by sample size (22). Thus, many other important phenomena is likely dependent on the scale at which the observation was made.

Observations at the pore-scale help us understand the underlying physics. While these observations are persistent for different non-wetting phases (see **Fig. 6**), how they manifest at the larger scale might not be trivial. This is because of the possibility of more pathways encouraging connectivity and the increased importance of viscous forces even in the capillary dominated regime. Furthermore, in the subsurface, the plume is large, this creates high capillary pressure even with low velocities. This is something that might not be able to be recreated in core-or pore-scale experiments. Furthermore, in these experiments water is injected to get the trapping efficiency. This is not representative of how water will move in the subsurface. In the subsurface, more pathways are possible, meaning that the plume may bypass the

region explored experimentally. Overall, there has been research that suggests that the observations made in small samples might not be representative of what happens at the larger scale. Experiments have been done in even longer cores, so that gravity effects start to play out (66). These experiments are incredibly challenging, as they require large volumes of pressurized fluid.

## 5. WHAT SCALE MATTERS THE MOST?

Here we examine what scale matters the most for capturing small-scale heterogeneities at the field scale. We explore what is a representative volume in experiments. Then we explore what is the minimum scale required in models to accurately capture the movement of the non-wetting phase in experiments (regardless of if the experiments are representative of larger scale fluid movement).

### 5.1. What sample size is representative of dynamics at the field scale?

Theoretically, a Representative Elementary Volume (REV) exists where you are imaging a representative volume, such that the observations made in that volume are representative of the continuum scale (34). By identifying an REV, a sense of what scale experiments are needed can be established, if the goal is to apply observations to the field scale movement of fluids in the subsurface. An REV is usually described as a cubic length side and is done so in this commentary.

For porosity and capillary pressure characteristic curves, the REV for both homogeneous and heterogeneous samples has been reported to be less than 2 mm by many researchers (29, 34, 68, 83). The REV for these quantities is within the range of pore-scale experimental sample sizes. In contrast, the REV for flow properties varies significantly between studies, and also between different quantities of interest. For saturation, Jackson et al (34) reported that the REV was 5.4 mm, while an REV was not observed even with a cubic length side of 20 mm in Wang et al (83). For the Euler characteristic (a measure of connectivity, see (82) for more details) the REV was not found for the non-wetting phase even at 40 mm (39). In Armstrong et al (5), the cluster length was defined as the lower boundary for the definition of the macroscopic scale, and thus indicative of an REV. This was calculated to be 54 mm for a homogeneous sandstone at low flow rates. This means that a REV for the parameters of interest have been reported to be somewhere between 5 mm and over 50 mm. Which is an incredibly wide range.

This leads to two questions: **1)** why is there such a large range? **2)** with advances in imaging capabilities and computational processing, do we aim for exploring pore-scale dynamics in larger samples? For the first question, work exploring the REV for dissolution found that the focusing effect was greater with increasing pore space heterogeneity, indicating that the REV for dissolution was far greater than the dissolution front itself (50). This non-local behavior has been seen elsewhere for non-wetting phase propagation. Armstrong et al (4) found that the zone of influence associated with a Haines jump was found to exist over a distance of multiple pores, and thus, is much larger than the correlation length of the homogeneous micro-model pattern the experiments were conducted in. This highlights the need to carefully consider what we want to capture in the REV, and to understand that REV will depend on heterogeneity. For the second question, pore scale imaging is being done in larger samples, however, if the REV is greater than 60 mm, this suggests that even some core-scale samples are smaller than an REV. These samples were deemed to be continuum-scale, and thus representative of dynamics at the larger field. This may not have been the case for heterogeneous systems, leading to uncertainty in all upscaled parameters taken from these core-scale observations.

### 5.2. How do we incorporate these findings into models?

In the previous sections, we have highlighted how small-scale heterogeneities heavily influence larger scale flow properties. Therefore, we want to incorporate these findings into our field scale models both through permeability and porosity data, but also through relative permeability and capillary pressure relationships.

Typical reservoir modeling assumes relative permeability is purely a function of saturation (7, 19). This is valid for connected pathway flow. In work by Picchi and Battiato (56), some dynamics, beyond connected pathway flow, can be captured with relative permeability functions and the viscosity ratio of the two

fluids present. For other flow regimes, the film thickness at the pore-scale or the average pore-scale curvature was needed (which is closely related to the Euler characteristic). The evolution of the Euler characteristic can account for hysteresis observed during multiphase flow (34, 48). However, the Euler characteristic is incredibly sensitive to resolution (26). This makes it difficult to measure at even the core-scale. Thus, making predictions of their values at the field scale impractical.

While it is difficult to resolve pore-scale fluid connectivity at the core-scale. There has been some success in calibrating numerical models against observed millimeter scale saturation heterogeneity, with these models able to accurately predict average pressure drop and equivalent relative permeability at the pore-scale for homogeneous sandstone samples (32, 86). However, these models already fail at making predictions for limestone rock cores with sub-resolution porosity and so might also insufficiently represent high degrees of heterogeneity in reservoir rocks (47, 86). Models have been created that incorporate this sub-resolution (or micro-porosity) (14). Here, the incorporation of micro-porosity was shown to influence the invasion of the non-wetting phase. However, determining the petrophysical parameters, and developing more advanced models, is limited by difficulties in measuring and quantifying flow in these regions where the porosity is below image resolution.

This leads to the question of: do we need to be able to resolve small features directly in models, or is there an upscaled representation of the underlying dynamics that can be applied at the field scale? The latter is preferable from a computational demand point of view. Another challenge is how to best incorporate the uncertainty in the geology into dynamic simulations. Currently, many $CO_2$ storage projects use a discrete geomodel to perform dynamic simulations and may perform a sensitivity study on certain reservoir parameters. However, this approach does not fully capture the uncertainty space with regards to the geology and reservoir parameters. These uncertainties can lead to significant differences in the predicted plume footprint and pressure buildups. In many cases, hundreds of simulations are required to fully characterize the subsurface (15). To mitigate the high computational cost of running the simulations needed to capture the uncertainty space, one solution is to use machine learning models. Machine learning techniques can accelerate the reservoir simulation process, enabling the necessary simulations to quantify the subsurface uncertainty and gain a probabilistic understanding of plume migration and pressure buildup throughout a project's lifecycle.

These models can be trained on a wide range of heterogeneities, and thus, fewer experiments are required to be run in order to populate a reservoir model (as these experiments are time-consuming, highly technical, and expensive) (49). However, if there are dynamics below the resolution of the images, machine learning models will have trouble incorporating them from segmented images (81). Deep learning models that can predict multiphase flow properties such as relative permeability and trapping are still lacking (84). However, there is ongoing research using machine learning to predict flow dynamics at the pore-scale, which could address these issues (28).

## 6. KEY OUTSTANDING QUESTIONS TO ADDRESS UPSCALING

There are a number of key outstanding questions that the authors of this commentary believe need to be addressed in future work.

1. **Does a global measure exist, that is independent of resolution, that can be used to characterize the propagation and trapping of $CO_2$ and $H_2$ in the subsurface?** Pressure is a promising metric, as it has been linked to fluid connectivity (75). However, there are some key questions to address since most experimental setups only measure the pressure drop across the core. **1)** Is spatially resolved pressure needed to link pressure fluctuations to the pore space heterogeneity and flow dynamics? **2)** Is pressure needed for just the non-wetting phase, or both fluid phases? **3)** How easy is it to resolve pore-scale pressure fluctuations at the field scale, where pressure will also be influenced by other factors such as tides (43)?

2. **Do we need to adapt experiments to be more representative of field scale plume migration?** We highlighted in this commentary that incorrectly scaling up capillary barriers and

highly channelized flow could significantly impact predictions. Most experiments measure trapping by injecting $CO_2$ or $H_2$ and then injecting water or brine. The water injection is not representative of how water migrates in the subsurface, which leads to uncertainty in the trapping estimates. Furthermore, with large plumes in the field, high capillary pressures arise under low flow rates. These are represented in experiments by injecting at high flow rates to get high capillary pressure. However, with the flow rate dependency observed, this might not be a good representation of what is occurring in the subsurface.

3. **Do we move away from a single prediction to a suite of predictions?** Machine learning allows us to perform many simulations with different subsurface realizations. This will enable researchers to quantify uncertainty in estimates of flow properties and heterogeneity. A probabilistic approach can help to characterize project risk better and lead to more informed decision-making by project stakeholders.

4. **Do we include small-scale heterogeneity using the conventional modeling framework?** Experiments dominated by small-scale heterogeneity have reduced water relative permeabilities and lower gas saturations than expected. Incorporating this to some extent will allow us to accommodate the impact of small-scale heterogeneities. But is something outside the conventional framework of relative permeability and trapping efficiency needed to successfully predict the migration and trapping of $CO_2$ and $H_2$ in the subsurface?

## 7. CONCLUSIONS

In this commentary, we highlighted the impact of small-scale heterogeneities on plume migration and trapping. We want to encourage future research on this topic that spans many orders of spatial and temporal scales to capture the full range of important dynamics. Efforts are also needed in upscaling and for accounting for differences across scales so that accurate predictions of plume migration can be made.

One avenue of interest would involve conducting many pore-scale experiments and then using data-driven algorithms and pressure data to determine the spectral signature of different event types, sizes, and frequencies. This could be used, in turn, in core-scale experiments to determine what dynamics persist and if new dynamics arise outside the signature of events recorded at the pore-scale. This approach would help elucidate the scalability of pore-scale experiments. Pressure data can also be measured at the field scale at different locations. If the underlying pore-scale dynamics can be deduced from this pressure data, it becomes possible to determine the most critical factors for modeling at the field scale. This represents a non-trivial task, as fluctuations in the pressure data caused by pore-scale dynamics would need to be separated from other factors influencing the signal, such as tides, vehicles, and other environmental influences.

While modeling small-scale heterogeneities is no easy feat, small-scale heterogeneities are not necessarily a negative feature of storage reservoirs. In fact, small-scale heterogeneities could be exploited to maximize trapping in $CO_2$ storage projects, making highly heterogeneous sites favorable. This is an area of ongoing research at the Otway International Test Center, where a deliberately heterogeneous site was chosen to explore the impact of heterogeneity on trapping (6). The injection of $CO_2$ at this site ended in January 2025, with analysis currently underway.

## STATEMENTS AND DECLARATIONS

### Author Contributions

All authors contributed to the preparation of this article, including the drafting, revising, and final approval.

## Conflicts of Interest

The authors have no conflicts of interest to declare.

## ORCID IDs

Catherin Spurin https://orcid.org/0000-0003-2396-8498
Catherine Callas https://orcid.org/0000-0002-7192-8362
Nihal Darraj https://orcid.org/0009-0007-4724-8440
Maja Rücker https://orcid.org/0000-0003-3699-5372
Sally Benson https://orcid.org/0000-0002-3733-4296

## REFERENCES

1. Adebayo, A. R., Barri, A. A., & Kamal, M. S. (2017). Effect of flow direction on relative permeability curves in water/gas reservoir system: Implications in geological $CO_2$ sequestration. *Geofluids*, 2017, 1–10. https://doi.org/10.1155/2017/1958463
2. Al-Yaseri, A., Abdel-Azeim, S., & Al-Hamad, J. (2023). Wettability of water-$H_2$-quartz and water-$H_2$-calcite experiment and molecular dynamics simulations: Critical assessment. *International Journal of Hydrogen Energy,* 48(89), 34897–34905. https://doi.org/10.1016/j.ijhydene.2023.05.294
3. Armitage, P. J., Faulkner, D. R., Worden, R. H., Aplin, A. C., Butcher, A. R., & Iliffe, J. (2011). Experimental measurement of, and controls on, permeability and permeability anisotropy of caprocks from the $CO_2$ storage project at the Krechba Field, Algeria. *Journal of Geophysical Research,* 116(B12), B12208. https://doi.org/10.1029/2011JB008385
4. Armstrong, R. T., Evseev, N., Koroteev, D., & Berg, S. (2015). Modeling the velocity field during Haines jumps in porous media. *Advances in Water Resources*, 77, 57–68. https://doi.org/10.1016/j.advwatres.2015.01.008
5. Armstrong, R. T., Georgiadis, A., Ott, H., Klemin, D., & Berg, S. (2014). Critical capillary number: desaturation studied with fast x-ray computed microtomography. Geophysical Research Letters, 41 (1), 55–60. https://doi.org/10.1002/2013GL058075
6. Benson, S. M., Bickle, M., Boon, M., Cook, P., Haese, R., et al. (2018). The Geocquest project: Quantifying the impact of heterogeneity on $CO_2$ migration and trapping in saline aquifers. *SSRN Electronic Journal*. https://doi.org/10.2139/ssrn.3366097
7. Blunt, M. J. (2017). Multiphase flow in permeable media (1st ed). Cambridge University Press.
8. Blunt, M. J., Bazylak, A., Brook, M., Muggeridge, A., & Orr, F. M. (2024). Research needs in porous media for the energy transition. *InterPore Journal,* 1(1), ipj260424-2. https://doi.org/10.69631/ipj.v1i1nr14
9. Blunt, M. J., Bijeljic, B., Dong, H., Gharbi, O., Iglauer, S., Mostaghimi, P., Paluszny, A., & Pentland, C. (2013). Pore-scale imaging and modelling. *Advances in Water Resources,* 51, 197–216. https://doi.org/10.1016/j.advwatres.2012.03.003
10. Boon, M., & Hajibeygi, H. (2022). Experimental characterization of $H_2$/water multiphase flow in heterogeneous sandstone rock at the core scale relevant for underground hydrogen storage (UHS). *Scientific Reports*, 12(1), 14604. https://doi.org/10.1038/s41598-022-18759-8
11. Boon, M., Matthäi, S. K., Shao, Q., Youssef, A. A., Mishra, A., & Benson, S. M. (2022). Anisotropic rate-dependent saturation functions for compositional simulation of sandstone composites. *Journal of Petroleum Science and Engineering,* 209, 109934. https://doi.org/10.1016/j.petrol.2021.109934
12. Bukar, I., Bell, R., Muggeridge, A. H., & Krevor, S. (2025). Carbon dioxide migration along faults at the illinois basin—Decatur project revealed using time shift analysis of seismic monitoring data. *Geophysical Research Letters,* 52(2), e2024GL110049. https://doi.org/10.1029/2024GL110049
13. Bultreys, T., De Boever, W., & Cnudde, V. (2016). Imaging and image-based fluid transport modeling at the pore scale in geological materials: A practical introduction to the current state-of-the-art. *Earth-Science Reviews,* 155, 93–128. https://doi.org/10.1016/j.earscirev.2016.02.001
14. Bultreys, T., Stappen, J. V., Kock, T. D., Boever, W. D., Boone, M. A., Hoorebeke, L. V., & Cnudde, V. (2016). Investigating the relative permeability behavior of microporosity-rich carbonates and tight sandstones with multiscale pore network models. *Journal of Geophysical Research: Solid Earth,* 121(11), 7929–7945. https://doi.org/10.1002/2016JB013328
15. Callas, C., Wen, G., & Benson, S. M. (2024). Enhancing Carbon Storage Assessments Through the Use of Probabilistic Simulation. In *Geological Society of America Abstracts* (Vol. 56, p. 401764).
16. Chadwick, R. A., & Noy, D. J. (2010). History-matching flow simulations and time-lapse seismic data from the Sleipner CO2 plume. *Geological Society, London, Petroleum Geology Conference Series,* 7(1), 1171–1182. https://doi.org/10.1144/0071171

17. Chang, R., Kim, S., Lee, S., Choi, S., Kim, M., & Park, Y. (2017). Calcium carbonate precipitation for $CO_2$ storage and utilization: A review of the carbonate crystallization and polymorphism. *Frontiers in Energy Research,* 5, 17. https://doi.org/10.3389/fenrg.2017.00017
18. Cnudde, V., Masschaele, B., Dierick, M., Vlassenbroeck, J., Hoorebeke, L. V., & Jacobs, P. (2006). Recent progress in X-ray CT as a geosciences tool. *Applied Geochemistry,* 21(5), 826–832. https://doi.org/10.1016/j.apgeochem.2006.02.010
19. Das, D., & Hassanizadeh, S. M. (2005). *Upscaling multiphase flow in porous media: From pore to core and beyond*.. Springer.
20. Dopffel, N., Jansen, S., & Gerritse, J. (2021). Microbial side effects of underground hydrogen storage – Knowledge gaps, risks and opportunities for successful implementation. *International Journal of Hydrogen Energy,* 46(12), 8594–8606. https://doi.org/10.1016/j.ijhydene.2020.12.058
21. Doughty, C., Freifeld, B. M., & Trautz, R. C. (2008). Site characterization for $CO_2$ geologic storage and vice versa: The Frio brine pilot, Texas, USA as a case study. *Environmental Geology,* 54(8), 1635–1656. https://doi.org/10.1007/s00254-007-0942-0
22. Ellman, S., Spurin, C., Jackson, S. J., Harris, C., Cnudde, V., & Bultreys, T. (2024). Multiphase relaxation dynamics at the µm-to-cm scale during storage of gases in rocks. *ESS Open Archive* . December 26, 2024. https://doi.org/10.22541/essoar.173524478.86281469/v1
23. Espinoza, D. N., & Santamarina, J. C. (2010). Water-$CO_2$ -mineral systems: Interfacial tension, contact angle, and diffusion—Implications to $CO_2$ geological storage. *Water Resources Research,* 46(7), 2009WR008634. https://doi.org/10.1029/2009WR008634
24. Fatah, A., Al-Yaseri, A., Radwan, O. A., & Theravalappil, R. (2025). Clay minerals and hydrogen: Insights into reactivity, pore structure, and chemical stability. *Fuel,* 389, 134615. https://doi.org/10.1016/j.fuel.2025.134615
25. Flemisch, B., Nordbotten, J. M., Fernø, M., Juanes, R., Both, J. W., et al. (2024). The fluidflower validation benchmark study for the storage of $CO_2$. *Transport in Porous Media,* 151(5), 865–912. https://doi.org/10.1007/s11242-023-01977-7
26. Garing, C., De Chalendar, J. A., Voltolini, M., Ajo-Franklin, J. B., & Benson, S. M. (2017). Pore-scale capillary pressure analysis using multi-scale X-ray micromotography. *Advances in Water Resources,* 104, 223–241. https://doi.org/10.1016/j.advwatres.2017.04.006
27. Gholami, R. (2023). Hydrogen storage in geological porous media: Solubility, mineral trapping, H2S generation and salt precipitation. *Journal of Energy Storage,* 59, 106576. https://doi.org/10.1016/j.est.2022.106576
28. Gu, Y., Spurin, C., & Wen, G. (2024). *Learning pore-scale multi-phase flow from experimental data with graph neural network*. arXiv. https://doi.org/10.48550/ARXIV.2411.14192
29. Halisch, M. (2013, September). The REV challenge–estimating representative elementary volumes and porous rock inhomogeneity from high resolution micro-CT data sets. In *Proceedings of International Symposium of the Society of Core Analysts, Napa Valley, California, USA* (pp. 16-19).
30. Hovorka, S. D., Benson, S. M., Doughty, C., Freifeld, B. M., Sakurai, S., et al. (2006). Measuring permanence of CO2 storage in saline formations: The Frio experiment. *Environmental Geosciences,* 13(2), 105–121. https://doi.org/10.1306/eg.11210505011
31. Hunt, J., Dotzenrod, N., Templeton, J., Regorrah, J., & Connors, K. (2024). Demonstration of plume stability for carbon storage projects. *SSRN Electronic Journal*. https://doi.org/10.2139/ssrn.5064536
32. Jackson, S. J., Agada, S., Reynolds, C. A., & Krevor, S. (2018). Characterizing drainage multiphase flow in heterogeneous sandstones. *Water Resources Research,* 54(4), 3139–3161. https://doi.org/10.1029/2017WR022282
33. Jackson, S. J., & Krevor, S. (2020). Small-scale capillary heterogeneity linked to rapid plume migration during $CO_2$ storage. *Geophysical Research Letters,* 47(18), e2020GL088616. https://doi.org/10.1029/2020GL088616
34. Jackson, S. J., Lin, Q., & Krevor, S. (2020). Representative elementary volumes, hysteresis, and heterogeneity in multiphase flow from the pore to continuum scale. *Water Resources Research,* 56(6), e2019WR026396. https://doi.org/10.1029/2019WR026396
35. Jangda, Z., Menke, H., Busch, A., Geiger, S., Bultreys, T., Lewis, H., & Singh, K. (2023). Pore-scale visualization of hydrogen storage in a sandstone at subsurface pressure and temperature conditions: Trapping, dissolution and wettability. *Journal of Colloid and Interface Science,* 629, 316–325. https://doi.org/10.1016/j.jcis.2022.09.082
36. Jangda, Z., Menke, H., Busch, A., Geiger, S., Bultreys, T., & Singh, K. (2024). Subsurface hydrogen storage controlled by small-scale rock heterogeneities. *International Journal of Hydrogen Energy,* 60, 1192–1202. https://doi.org/10.1016/j.ijhydene.2024.02.233
37. Jung, H., Singh, G., Nicolas Espinoza, D., & Wheeler, M. F. (2017). An integrated case study of the Frio $CO_2$ sequestration pilot test for safe and effective carbon storage including compositional flow and geomechanics. *SPE Reservoir Simulation Conference*, D012S014R011. https://doi.org/10.2118/182710-MS

38. Kentish, S., Scholes, C., & Stevens, G. (2008). Carbon dioxide separation through polymeric membrane systems for flue gas applications. *Recent Patents on Chemical Engineering,* 1(1), 52–66. https://doi.org/10.2174/2211334710801010052
39. Koestel, J., Larsbo, M., & Jarvis, N. (2020). Scale and REV analyses for porosity and pore connectivity measures in undisturbed soil. *Geoderma,* 366, 114206. https://doi.org/10.1016/j.geoderma.2020.114206
40. Krevor, S., Blunt, M. J., Benson, S. M., Pentland, C. H., Reynolds, C., Al-Menhali, A., & Niu, B. (2015). Capillary trapping for geologic carbon dioxide storage – From pore scale physics to field scale implications. *International Journal of Greenhouse Gas Control,* 40, 221–237. https://doi.org/10.1016/j.ijggc.2015.04.006
41. Krevor, S. C. M., Pini, R., Li, B., & Benson, S. M. (2011). Capillary heterogeneity trapping of $CO_2$ in a sandstone rock at reservoir conditions. *Geophysical Research Letters*, 38(15), 2011GL048239. https://doi.org/10.1029/2011GL048239
42. Krevor, S. C. M., Pini, R., Zuo, L., & Benson, S. M. (2012). Relative permeability and trapping of $CO_2$ and water in sandstone rocks at reservoir conditions. *Water Resources Research*, 48(2), 2011WR010859. https://doi.org/10.1029/2011WR010859
43. Kumar, P., Tsujimura, M., Nakano, T., & Minoru, T. (2013). Time series analysis for the estimation of tidal fluctuation effect on different aquifers in a small coastal area of Saijo plain, Ehime prefecture, Japan. *Environmental Geochemistry and Health,* 35(2), 239–250. https://doi.org/10.1007/s10653-012-9479-6
44. Kuo, C.-W., & Benson, S. M. (2015). Numerical and analytical study of effects of small scale heterogeneity on $CO_2$/brine multiphase flow system in horizontal corefloods. *Advances in Water Resources,* 79, 1–17. https://doi.org/10.1016/j.advwatres.2015.01.012
45. Kuo, C.-W., Perrin, J.-C., & Benson, S. M. (2010). Effect of gravity, flow rate, and small scale heterogeneity on multiphase flow of co2 and brine. *SPE Western Regional Meeting*, SPE-132607-MS. https://doi.org/10.2118/132607-MS
46. Lin, J.-Y., Garcia, E. A., Ballesteros, F. C., Garcia-Segura, S., & Lu, M.-C. (2022). A review on chemical precipitation in carbon capture, utilization and storage. *Sustainable Environment Research,* 32(1), 45. https://doi.org/10.1186/s42834-022-00155-6
47. Manoorkar, S., Jackson, S. J., & Krevor, S. (2021). Observations of the impacts of millimeter- to centimeter-scale heterogeneities on relative permeability and trapping in carbonate rocks. *Water Resources Research,* 57(4), e2020WR028597. https://doi.org/10.1029/2020WR028597
48. McClure, J. E., Ramstad, T., Li, Z., Armstrong, R. T., & Berg, S. (2020). Modeling geometric state for fluids in porous media: Evolution of the Euler characteristic. *Transport in Porous Media,* 133(2), 229–250. https://doi.org/10.1007/s11242-020-01420-1
49. Menke, H., Maes, J., & Geiger, S. (2021). Upscaling the porosity–permeability relationship of a microporous carbonate for Darcy-scale flow with machine learning. *Scientific Reports,* 11(1), 2625. https://doi.org/10.1038/s41598-021-82029-2
50. Menke, H., Reynolds, C. A., Andrew, M. G., Pereira Nunes, J. P., Bijeljic, B., & Blunt, M. J. (2018). 4D multi-scale imaging of reactive flow in carbonates: Assessing the impact of heterogeneity on dissolution regimes using streamlines at multiple length scales. *Chemical Geology,* 481, 27–37. https://doi.org/10.1016/j.chemgeo.2018.01.016
51. Menke, H. P., Maes, J., & Geiger, S. (2023). Channeling is a distinct class of dissolution in complex porous media. *Scientific Reports,* 13(1), 11312. https://doi.org/10.1038/s41598-023-37725-6
52. Mishra, A., Kurtev, K. D., & Haese, R. R. (2020). Composite rock types as part of a workflow for the integration of mm-to cm-scale lithological heterogeneity in static reservoir models. *Marine and Petroleum Geology,* 114, 104240. https://doi.org/10.1016/j.marpetgeo.2020.104240
53. Nordbotten, J. M., Celia, M. A., & Bachu, S. (2005). Injection and storage of $CO_2$ in deep saline aquifers: Analytical solution for co2 plume evolution during injection. *Transport in Porous Media,* 58(3), 339–360. https://doi.org/10.1007/s11242-004-0670-9
54. Oh, J., Kim, K.-Y., Han, W. S., & Park, E. (2017). Transport of $CO_2$ in heterogeneous porous media: Spatio-temporal variation of trapping mechanisms. *International Journal of Greenhouse Gas Control,* 57, 52–62. https://doi.org/10.1016/j.ijggc.2016.12.006
55. Perrin, J.-C., Krause, M., Kuo, C.-W., Miljkovic, L., Charoba, E., & Benson, S. M. (2009). Core-scale experimental study of relative permeability properties of $CO_2$ and brine in reservoir rocks. *Energy Procedia,* 1(1), 3515–3522. https://doi.org/10.1016/j.egypro.2009.02.144
56. Picchi, D., & Battiato, I. (2018). The impact of pore-scale flow regimes on upscaling of immiscible two-phase flow in porous media. *Water Resources Research*, 54 (9), 6683–6707. https://doi.org/10.1029/2018WR023172
57. Raza, A., Gholami, R., Rezaee, R., Bing, C. H., Nagarajan, R., & Hamid, M. A. (2017). $CO_2$ storage in heterogeneous aquifer: A study on the effect of temperature and mineral precipitation. *IOP Conference Series: Materials Science and Engineering,* 206, 012002. https://doi.org/10.1088/1757-899X/206/1/012002

58. Reynolds, C. A., & Krevor, S. (2015). Characterizing flow behavior for gas injection: Relative permeability of $CO_2$-brine and $N_2$-water in heterogeneous rocks. *Water Resources Research,* 51(12), 9464–9489. https://doi.org/10.1002/2015WR018046
59. Reynolds, C. A., Menke, H., Andrew, M., Blunt, M. J., & Krevor, S. (2017). Dynamic fluid connectivity during steady-state multiphase flow in a sandstone. Proceedings of the National Academy of Sciences, 114 (31), 8187–8192.
60. Ringrose, P. S., Mathieson, A. S., Wright, I. W., Selama, F., Hansen, O., et al. (2013). The in salah $CO_2$ storage project: Lessons learned and knowledge transfer. *Energy Procedia,* 37, 6226–6236. https://doi.org/10.1016/j.egypro.2013.06.551
61. Romano, C. R., Zahasky, C., Garing, C., Minto, J. M., Benson, S. M., et al. (2020). Subcore scale fluid flow behavior in a sandstone with cataclastic deformation bands. *Water Resources Research,* 56(4), e2019WR026715. https://doi.org/10.1029/2019WR026715
62. Rücker, M., Bartels, W. B., Bultreys, T., Boone, M., Singh, K., et al. (2020). Workflow for upscaling wettability from the nanoscale to core scale. *Petrophysics,* 61(02), 189-205. https://doi.org/10.30632/PJV61N2-2020a5
63. Rücker, M., Bartels, W.-B., Garfi, G., Shams, M., Bultreys, T., et al. (2020). Relationship between wetting and capillary pressure in a crude oil/brine/rock system: From nano-scale to core-scale. *Journal of Colloid and Interface Science,* 562, 159–169. https://doi.org/10.1016/j.jcis.2019.11.086
64. Schimmel, M. T. W., Hangx, S. J. T., & Spiers, C. J. (2022). Effect of pore fluid chemistry on uniaxial compaction creep of Bentheim sandstone and implications for reservoir injection operations. *Geomechanics for Energy and the Environment,* 29, 100272. https://doi.org/10.1016/j.gete.2021.100272
65. Senel, O., Will, R., & Butsch, R. J. (2014). Integrated reservoir modeling at the Illinois basin – Decatur project. *Greenhouse Gases: Science and Technology,* 4(5), 662–684. https://doi.org/10.1002/ghg.1451
66. Seyyedi, M., Clennell, M. B., & Jackson, S. J. (2022). Time-lapse imaging of flow instability and rock heterogeneity impacts on $CO_2$ plume migration in meter long sandstone cores. *Advances in Water Resources,* 164, 104216. https://doi.org/10.1016/j.advwatres.2022.104216
67. Shi, J.-Q., Durucan, S., Korre, A., Ringrose, P., & Mathieson, A. (2019). History matching and pressure analysis with stress-dependent permeability using the In Salah $CO_2$ storage case study. *International Journal of Greenhouse Gas Control,* 91, 102844. https://doi.org/10.1016/j.ijggc.2019.102844
68. Singh, A., Regenauer-Lieb, K., Walsh, S. D. C., Armstrong, R. T., Van Griethuysen, J. J. M., & Mostaghimi, P. (2020). On representative elementary volumes of grayscale micro-CT images of porous media. *Geophysical Research Letters,* 47(15), e2020GL088594. https://doi.org/10.1029/2020GL088594
69. Soulaine, C., Roman, S., Kovscek, A., & Tchelepi, H. A. (2017). Mineral dissolution and wormholing from a pore-scale perspective. *Journal of Fluid Mechanics,* 827, 457–483. https://doi.org/10.1017/jfm.2017.499
70. Spurin, C., Bultreys, T., Bijeljic, B., Blunt, M. J., & Krevor, S. (2019a). Intermittent fluid connectivity during two-phase flow in a heterogeneous carbonate rock. *Physical Review E*, 100(4), 043103. https://doi.org/10.1103/PhysRevE.100.043103
71. Spurin, C., Bultreys, T., Bijeljic, B., Blunt, M. J., & Krevor, S. (2019b). Mechanisms controlling fluid breakup and reconnection during two-phase flow in porous media. *Physical Review E,* 100(4), 043115. https://doi.org/10.1103/PhysRevE.100.043115
72. Spurin, C., Bultreys, T., Rücker, M., Garfi, G., Schlepütz, C. M., et al. (2020). Real-time imaging reveals distinct pore-scale dynamics during transient and equilibrium subsurface multiphase flow. *Water Resources Research,* 56(12), e2020WR028287. https://doi.org/10.1029/2020WR028287
73. Spurin, C., Bultreys, T., Rücker, M., Garfi, G., Schlepütz, C. M., et al. (2021). The development of intermittent multiphase fluid flow pathways through a porous rock. *Advances in Water Resources,* 150, 103868. https://doi.org/10.1016/j.advwatres.2021.103868
74. Spurin, C., Ellman, S., Bultreys, T., & Tchelepi, H. A. (2024). The role of injection method on residual trapping at the pore-scale in continuum-scale samples. *International Journal of Greenhouse Gas Control,* 131, 104035. https://doi.org/10.1016/j.ijggc.2023.104035
75. Spurin, C., Roberts, G. G., O'Malley, C. P. B., Kurotori, T., Krevor, S., et al. (2023). Pore-scale fluid dynamics resolved in pressure fluctuations at the darcy scale. *Geophysical Research Letters,* 50(18), e2023GL104473. https://doi.org/10.1029/2023GL104473
76. Strandli, C. W., Mehnert, E., & Benson, S. M. (2014). $CO_2$ plume tracking and history matching using multilevel pressure monitoring at the Illinois basin – Decatur project. *Energy Procedia,* 63, 4473–4484. https://doi.org/10.1016/j.egypro.2014.11.483
77. Tavakoli, V. (2018). *Geological core analysis: Application to reservoir characterization*. Springer.
78. Thaysen, E. M., Jangda, Z., Hassanpouryouzband, A., Menke, H., Singh, K., et al. (2024). Hydrogen wettability and capillary pressure in Clashach sandstone for underground hydrogen storage. *Journal of Energy Storage,* 97, 112916. https://doi.org/10.1016/j.est.2024.112916

79. Thaysen, E. M., McMahon, S., Strobel, G. J., Butler, I. B., Ngwenya, B., et al (2023). Estimating microbial growth and hydrogen consumption in hydrogen storage in porous media. *Renewable and Sustainable Energy Reviews, 151*, 111481. https://doi.org/10.1016/j.rser.2021.111481
80. Ubillus, J. E., Bakhshian, S., Ni, H., DiCarlo, D., & Meckel, T. (2025). Informing field-scale $CO_2$ storage simulations with sandbox experiments: The effect of small-scale heterogeneities. *International Journal of Greenhouse Gas Control,* 141, 104318. https://doi.org/10.1016/j.ijggc.2025.104318
81. Vidal, A. D., Neta, A. P. M., De Castro Vargas Fernandes, J., Medeiros, L. C., Dos Anjos, C. E. M., e al. (2024). Multi-resolution X-ray micro-computed tomography images of carbonate rocks from Brazilian pre-salt. *Scientific Data,* 11(1), 1361. https://doi.org/10.1038/s41597-024-04198-9
82. Vogel, H.-J. (2002). Topological characterization of porous media. In: Mecke, K. & Stoyan, D. (Eds.), *Morphology of Condensed Matter* (Vol. 600, pp. 75–92). Springer Berlin Heidelberg. https://doi.org/10.1007/3-540-45782-8_3
83. Wang, S., Spurin, C., & Bultreys, T. (2023). Pore-scale imaging of multiphase flow fluctuations in continuum-scale samples. *Water Resources Research,* 59(6), e2023WR034720. https://doi.org/10.1029/2023WR034720
84. Wang, W., Xie, Q., An, S., Bakhshian, S., Kang, Q., et al. (2023). Pore-scale simulation of multiphase flow and reactive transport processes involved in geologic carbon sequestration. *Earth-Science Reviews*, 247, 104602. https://doi.org/10.1016/j.earscirev.2023.104602
85. Wei, N., Gill, M., Crandall, D., McIntyre, D., Wang, Y., Bruner, K., Li, X., & Bromhal, G. (2014). $CO_2$ flooding properties of Liujiagou sandstone: Influence of sub-core scale structure heterogeneity. *Greenhouse Gases: Science and Technology,* 4(3), 400–418. https://doi.org/10.1002/ghg.1407
86. Wenck, N., Jackson, S. J., Manoorkar, S., Muggeridge, A., & Krevor, S. (2021). Simulating core floods in heterogeneous sandstone and carbonate rocks. *Water Resources Research,* 57(9), e2021WR030581. https://doi.org/10.1029/2021WR030581
87. Wildenschild, D., & Sheppard, A. P. (2013). X-ray imaging and analysis techniques for quantifying pore-scale structure and processes in subsurface porous medium systems. *Advances in Water Resources,* 51, 217–246. https://doi.org/10.1016/j.advwatres.2012.07.018
88. Williams, G. A., & Chadwick, R. A. (2017). An improved history-match for layer spreading within the sleipner plume including thermal propagation effects. *Energy Procedia,* 114, 2856–2870. https://doi.org/10.1016/j.egypro.2017.03.1406
89. Wolff-Boenisch, D., Abid, H. R., Tucek, J. E., Keshavarz, A., & Iglauer, S. (2023). Importance of clay-$H_2$ interactions for large-scale underground hydrogen storage. *International Journal of Hydrogen Energy,* 48(37), 13934–13942. https://doi.org/10.1016/j.ijhydene.2022.12.324
90. Wu, Y.-S., Pruess, K., & Persoff, P. (1998). Gas flow in porous media with Klingenberg effects. Transport in porous Media, 32 , 117–137. https://doi.org/10.1023/A:1006535211684
91. Yekeen, N., Al-Yaseri, A., Negash, B. M., Ali, M., Giwelli, A., et al. (2022). Clay-hydrogen and clay-cushion gas interfacial tensions: Implications for hydrogen storage. *International Journal of Hydrogen Energy,* 47(44), 19155–19167. https://doi.org/10.1016/j.ijhydene.2022.04.103
92. Zakkour, P., & Haines, M. (2007). Permitting issues for $CO_2$ capture, transport and geological storage: A review of Europe, USA, Canada and Australia. *International Journal of Greenhouse Gas Control,* 1(1), 94–100. https://doi.org/10.1016/S1750-5836(06)00008-9
93. Zhang, Y., Bijeljic, B., Gao, Y., Lin, Q., & Blunt, M. J. (2021). Quantification of nonlinear multiphase flow in porous media. *Geophysical Research Letters,* 48(5), e2020GL090477. https://doi.org/10.1029/2020GL090477
94. Zheng, L., Rücker, M., Bultreys, T., Georgiadis, A., Mooijer-van Den Heuvel, M. M., et al. (2020). Surrogate models for studying the wettability of nanoscale natural rough surfaces using molecular dynamics. *Energies,* 13(11), 2770. https://doi.org/10.3390/en13112770